

LOC I-MWO	APP CRS	Rwy Ldg	5801
111.1	233°	TDZE	650
		Apt Elev	651

LOC RWY 23



MIDDLETOWN RGNL/HOOK FLD (MWO)

ADF required.

Rwy 23 helicopter visibility reduction below 3/4 SM NA. Circling NA to Rwys 8 and 26.
 Circling Rwy 5 NA at night. When local altimeter not received use MGY altimeter setting, increase all MDAs 80 feet and S-LOC 23 visibility Cats C and D 1/4 SM.

MISSED APPROACH: Climb to 2600 then climbing left turn to 3000 direct ONIDA LOM and hold.

AWOS-3PT	COLUMBUS APP CON	UNICOM
120.025	118.85 269.275	123.0 (CTAF)

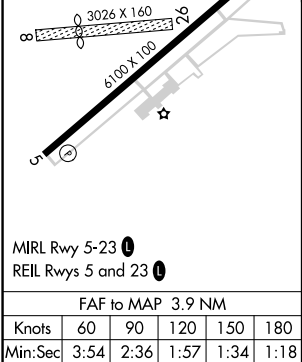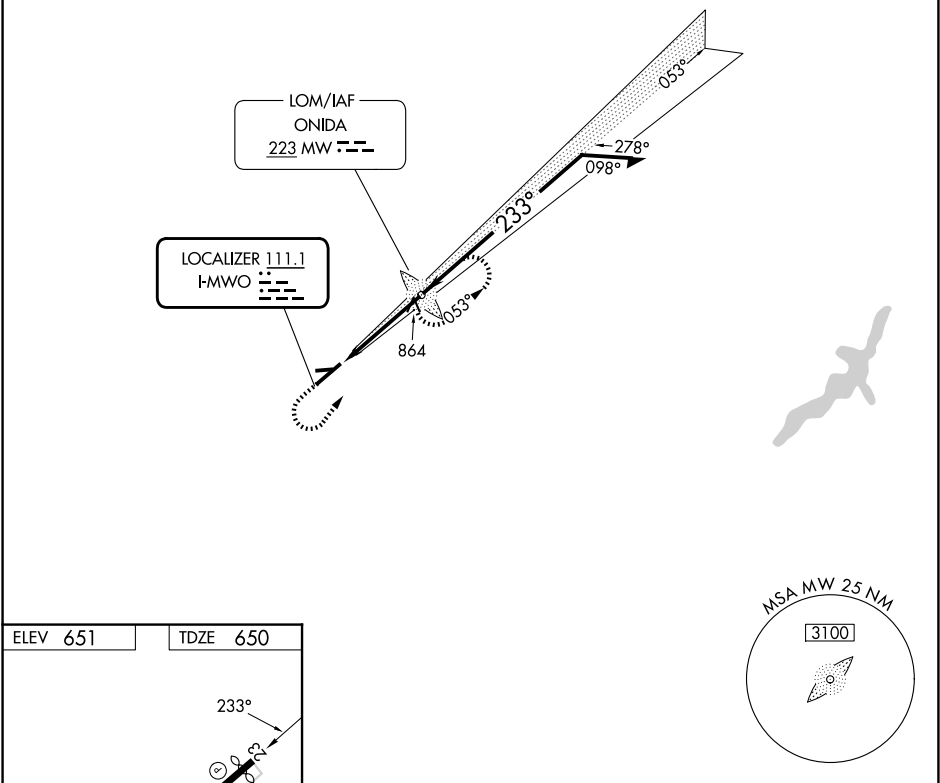

2600	3000	MW	MW LOM	Remain within 10 NM
VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 26).				
3.14° TCH 45				
3.9 NM				
CATEGORY	A	B	C	D
S-LOC 23	1140-1	490 (500-1)	1140-1 3/8 490 (500-1 3/8)	1140-1 1/2 490 (500-1 1/2)
CIRCLING	1380-1	729 (800-1)	1720-3 1069 (1100-3)	1840-3 1189 (1200-3)

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026