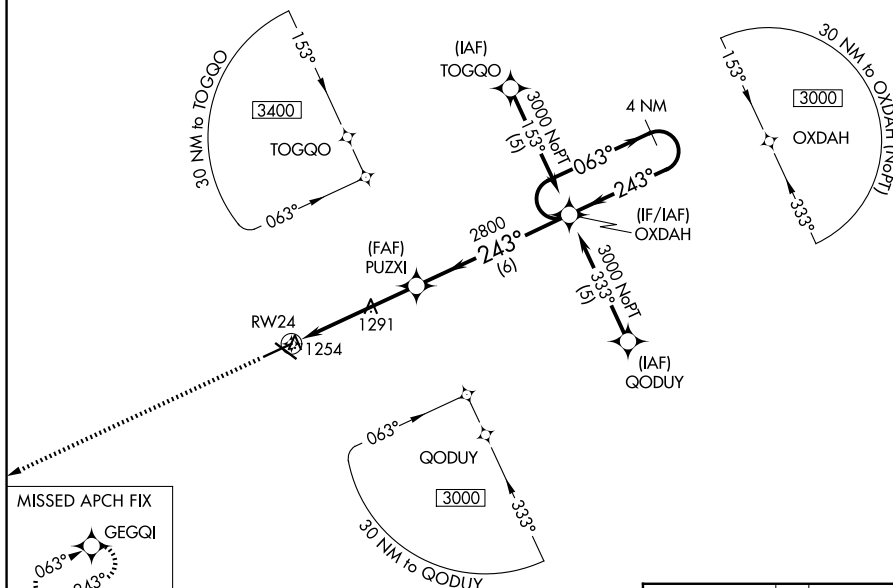


RNAV (GPS) RWY 24
FORT DODGE RGNL (FOD)

T Baro-VNAV and VDP NA when using Webster City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1448 feet; increase LNAV/VNAV DA to 1546 feet; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C visibility ½ mile.

MISSED APPROACH:
Climb to 3000 direct
GEGQI and hold.

UNICOM
123.0 (CTAF) **L**

3000	GEGQI	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).
------	-------	--

*LNAV only.

*1.1 NM to

PUZXI

OXDAH


4 NM
Holding Pattern

- 3000

$$\frac{\text{GP } 3.00^\circ}{\text{TCH } 50}$$

	1.1 NM	3.8 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA	1406-1		250 (300-1)	
LNAV/ VNAV DA	1504-1¼		348 (400-1¼)	
LNAV MDA	1560-1	404 (500-1)	1560-1½ 404 (500-1½)	1560-1¼ 404 (500-1¼)
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

ELEV 1156	D	TDZE 1156
-----------	----------	-----------



HIRL Rwy 6-24 **L**
MIRL Rwy 12-30 **L**
REIL Rwy 12, 24 and 30 **L**

NC-3, 22 JAN 2026 to 19 FEB 2026