

RNAV (GPS) RWY 25

WAAS CH 83310 W25A	APCH CRS 252°	Rwy Idg TDZE 449 Arpt Elev 449
--	-------------------------	--


[USA]


LADD AAF (PAFB)

RNP APCH-GPS		ALSIF-1 	MISSED APPROACH: Climb to 1000 then climbing left turn to 4200 direct IMARE and hold.	
* When ALS inop, increase vis to 1½ miles. ** When ALS inop, increase CAT CD vis to 1½ miles. *** Circling not authorized N of Rwy 7-25.				
ATIS 134.25	FAIRBANKS APP CON 127.1 251.1 360° - 179° 125.35 363.2 180° - 359°	TOWER★ 125.0 (CTAF) 0 284.6	GND CON 121.7 263.15	ASR/PAR

Procedure NA for arrivals at FIBEX on V301 southwest bound and at IMARE on V444 east bound.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.

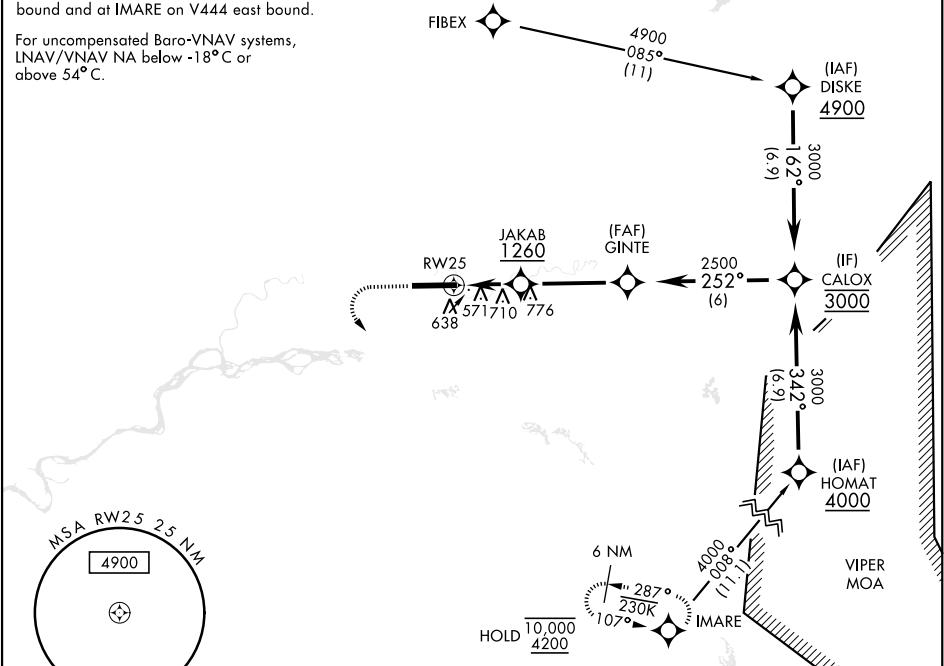

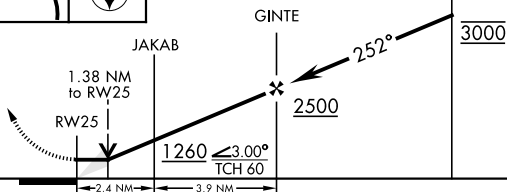1000		4200	IMARE	VGSI and descent angles not coincident (VGSI angle 3.30/TCH 67).		CALOX
						
CATEGORY		A	B	C	D	
LPV DA		649-1	200	(200-1)		
LNAV/VNAV DA*		853-1	404	(500-1)		
LNAV MDA**		1000-1	551 (600-1)	1000-1½	551 (600-1½)	
CIRCLING***		1000-1	1040-1	1080-1¾	1160-2¼	
		551 (600-1)	591 (600-1)	631 (700-1¾)	711 (800-2¼)	
		HIRL Rwy 7-25 				
		† ALS non-standard				

RNAV (GPS) RWY 25