


WAAS CH 77501 W21A	APP CRS 207°	Rwy Idg TDZE Apt Elev	5200 1540 1540
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

VENANGO RGNL (F'KL)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (114°F). Circling Rwy 12 NA at night. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.		MALSRL 	MISSED APPROACH: Climb to 3400 direct BUVCA and hold.
AWOS-3PT 118.175	YOUNGSTOWN APP CON ★ 126.25 322.3	CLNC DEL 126.25	UNICOM 122.7 (CTAF) 0

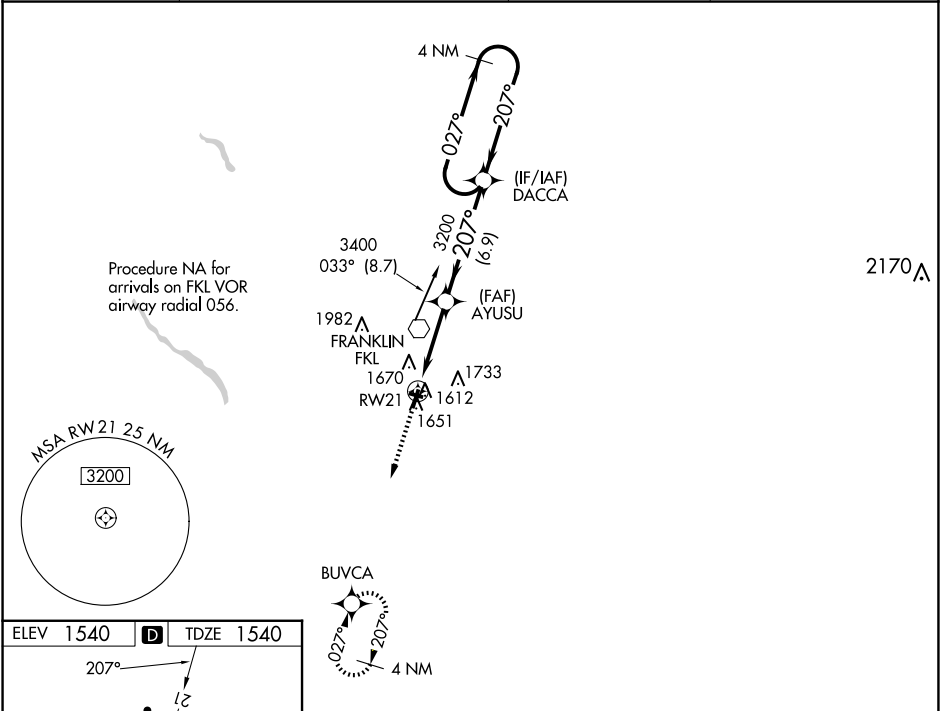

ELEV 1540 D TDZE 1540		3400 BUVCA		4 NM Holding Pattern
207°		* LNAV only.		AYUSU 3200
1596		* 1 NM TO RW21		DACCA
3593 X 100		RW21		3400
5200 X 150		1 NM		GP 3.00° TCH 55
30		4 NM		
3		6.9 NM		
MRL Rwy 12-30 0		CATEGORY		A B C D
HIRL Rwy 3-21 0		LPV DA		1803-½ 263 (300-½)
		LNAV/VNAV DA		1901-¾ 361 (400-¾)
		LNAV MDA		1900-½ 360 (400-½) 1900-⅝ 360 (400-⅝)
		CIRCLING		1960-1¼ 420 (500-1¼) 2000-1¼ 460 (500-1¼) 2040-1½ 500 (500-1½) 2100-2 560 (600-2)