


WAAS CH 78237 W03A	APP CRS 025°	Rwy Ldg TDZE 937 Apt Elev 937
--	------------------------	---

RNAV (GPS) RWY 3
DELAWARE COUNTY RGNL (MIE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ¾ mile, LNAV/VNAV all Cats visibility ¾ mile and Circling Cats C/D visibility ½ mile. Baro-VNAV NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2800 direct
IFECA and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

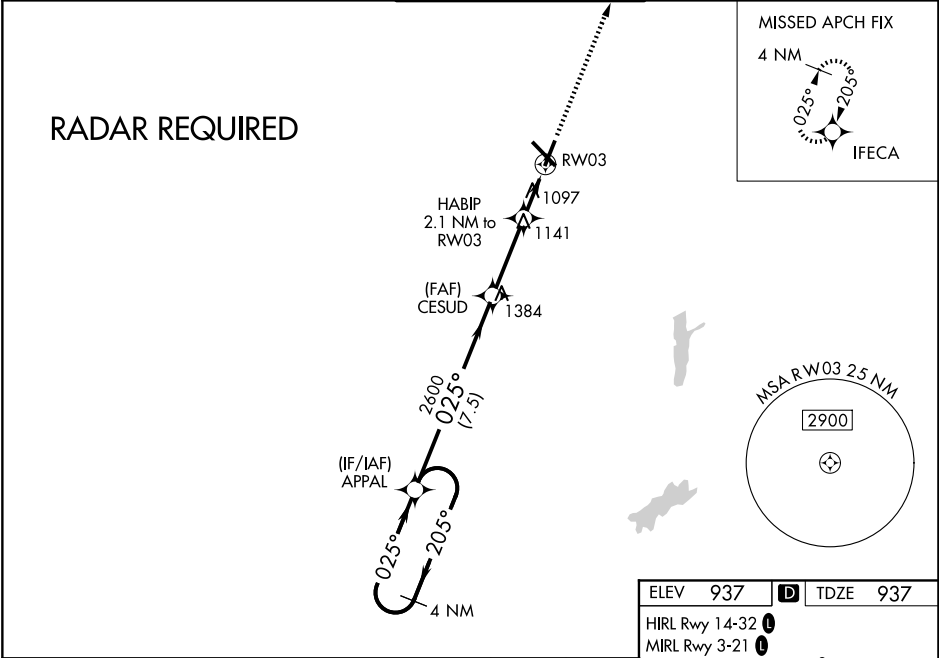

4 NM Holding Pattern APPAL

2800 ← 205° / 025° →

GP 3.00° TCH 39

CESUD 2600

HABIP 2.1 NM to RW03

*1640

*1.2 NM to RW03

RW03

7.5 NM 3 NM 0.9 NM 1.2 NM

2800 IFECA

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	1190-7/8 253 (300-7/8)			
LNAV/VNAV DA	1412-15/8 475 (500-15/8)			
LNAV MDA	1360-1	423 (500-1)	1360-11/4	423 (500-11/4)
CIRCLING	1460-1	523 (600-1)	1500-11/2	1600-2
			563 (600-11/2)	663 (700-2)

ELEV 937 **D** TDZE 937

HIRL Rwy 14-32 **0**

MIRL Rwy 3-21 **0**

REIL Rwys 3, 14 and 21 **0**

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026