
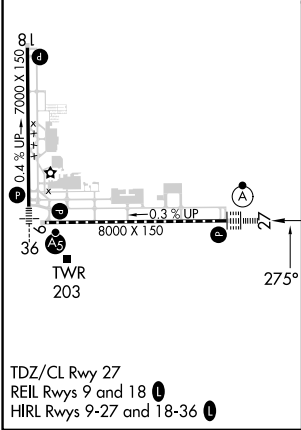


WAAS CH 97302 W27A	APP CRS 275°	Rwy Ldg TDZE 58 Apt Elev 83
--	------------------------	---

RNAV (GPS) RWY 27
Tallahassee Intl (TLH)

RNP APCH. ▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.		ALSF-2 ⓐ	MISSED APPROACH: Climb to 3000 direct RAGKO and hold.	
ATIS 119.45 239.25	Tallahassee APP CON ★ 135.8 317.4	Tallahassee Tower ★ 118.7 (CTAF) 0 257.8		GND CON 121.9 348.6
				UNICOM 123.075

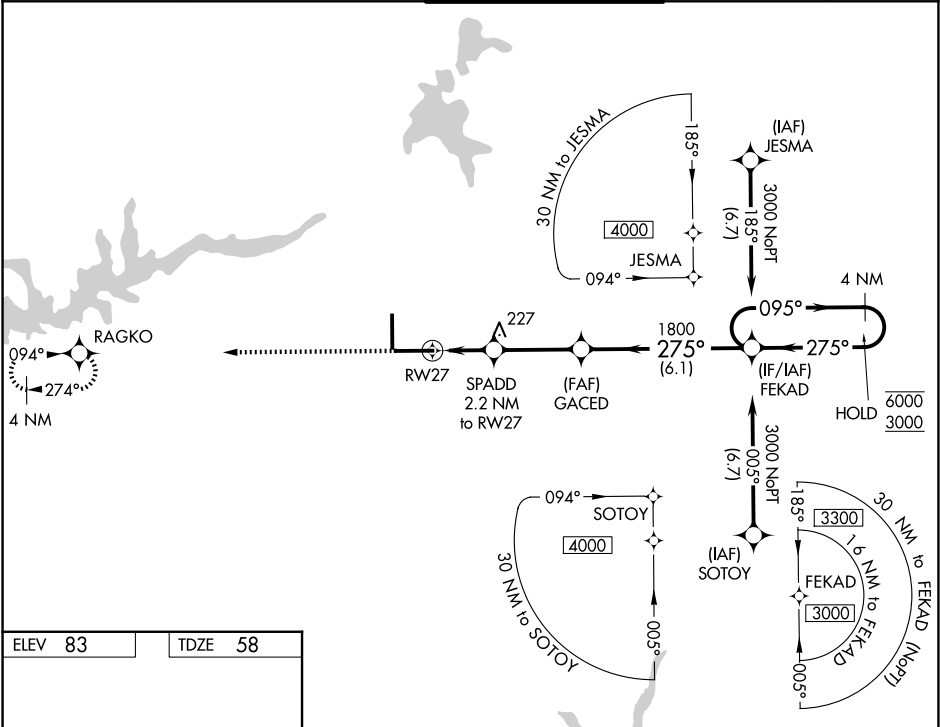

3000 ↑ RAGKO *LNAV only.		SPADD 2.2 NM to RW27 *1.2 NM to RW27 800*		GACED 1800 275° 1800		FEKAD 4 NM Holding Pattern 095° → 6000 ← 275° 3000 GP 3.00° TCH 59			
		1.2 NM		1 NM		3.1 NM		6.1 NM	
CATEGORY		A		B		C		D	
LPV DA		258/18		200 (200-½)					
LNAV/VNAV DA		375/30		317 (300-⅝)					
LNAV MDA		480/24		422 (400-½)		480/40		422 (400-¾)	
CIRCLING		580-1 497 (500-1)		600-1 517 (600-1)		640-1½ 557 (600-1½)		800-2¼ 717 (800-2¼)	