


WAAS CH 60900 W36A	APP CRS 004°	Rwy Ldg 7000 TDZE 62 Apt Elev 83
--	------------------------	---


RNAV (GPS) RWY 36
Tallahassee Intl (TLH)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. ▲ For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4500. ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR A5	MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.
--	-------------	---

ATIS 119.45 239.25	Tallahassee APP CON ★ 135.8 317.4	Tallahassee Tower ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 123.075
------------------------------	---	---	-------------------------------	--------------------------

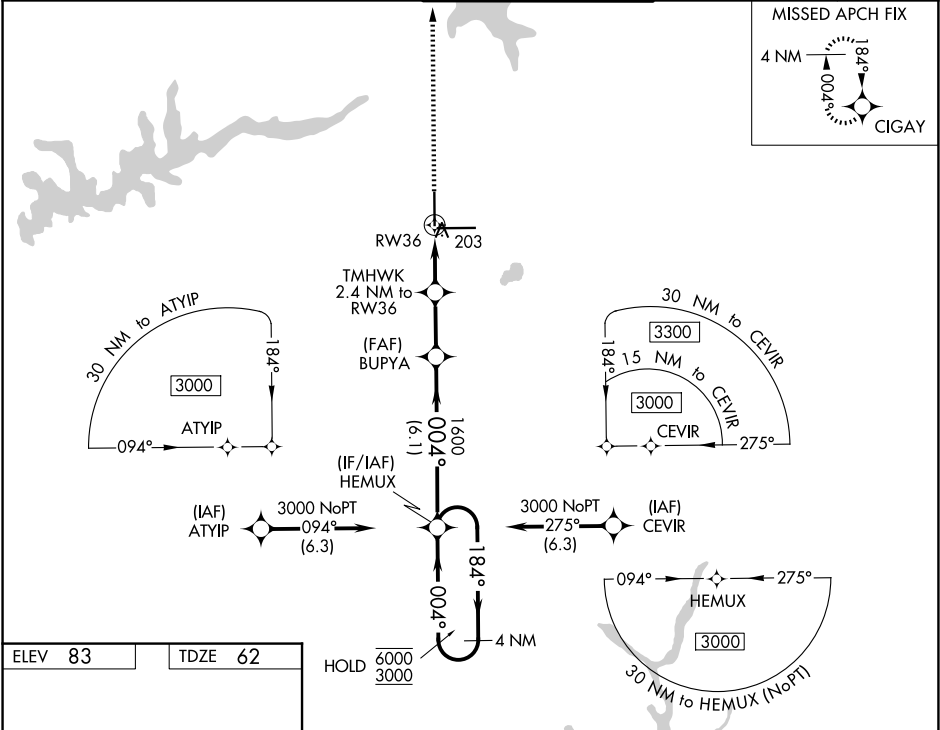

ELEV 83	TDZE 62
----------------	----------------

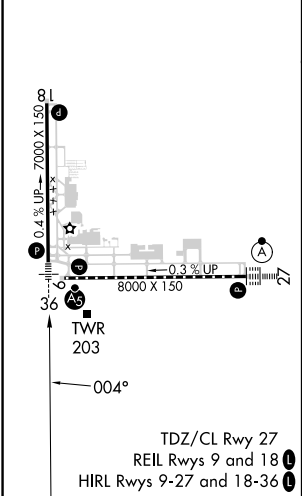

3000

CIGAY

4 NM Holding Pattern

HEMUX

184° → 6000

← 004° 3000

GP 3.00° TCH 54

TMHWK 2.4 NM to RW36

BUPYA 1600

HEMUX

1.1 NM to RW36

880

1600

1.1 NM

1.3 NM

2.3 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA *	262/24 200 (200-½)			
LNAV/VNAV DA	364/24 302 (300-½)			
LNAV MDA	460/24 398 (400-½)	460/35 398 (400-½)		
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-½)	800-2¼ 717 (800-2¼)