



WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg TDZE 2351 Apt Elev 2351
--	------------------------	---

RNAV (GPS) RWY 6
GENERAL WM J FOX AIRFIELD (WJF)

▼ When VGSI inop, Straight-in/Circling Rwy 6 procedure NA at night.
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F). When local altimeter setting not received, use Palmdale altimeter setting: increase LPV DA to 2661 feet, LNAV/VNAV DA to 2709 feet and all MDAs 60 feet, and increase Circling Cats C/D visibility ¼ SM. Baro-VNAV NA when using Palmdale altimeter setting.


MISSED APPROACH: Climb to 6000 direct SISOY and via 091° track to ETHER and hold.

ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER* 118.525 (CTAF) 256.9	GND CON 121.7 256.9	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	-------------------------

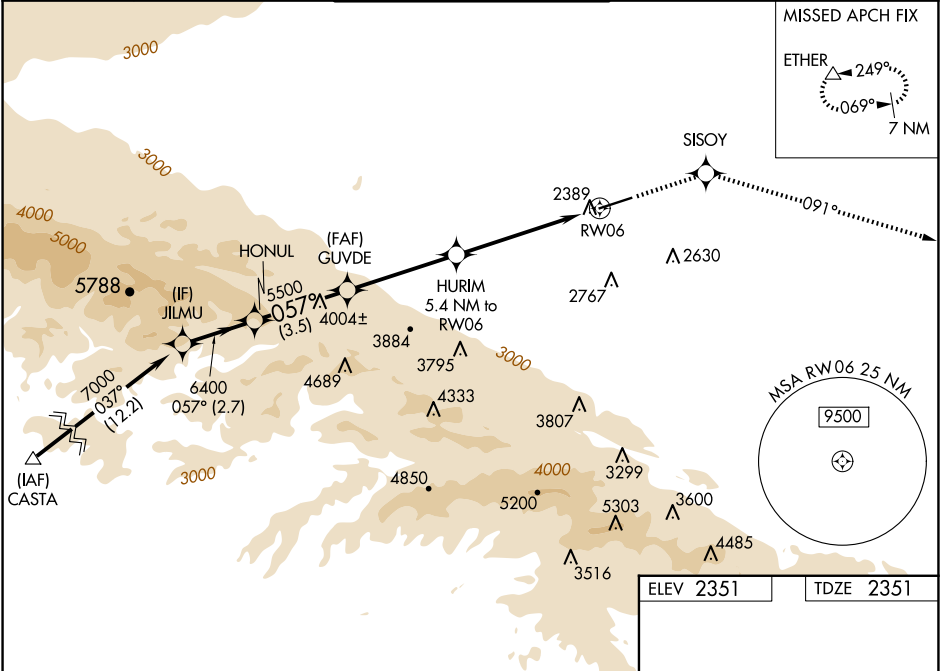

ELEV 2351	TDZE 2351
-----------	-----------

					6000 ↑	SISOY ✦	tr 091° ○	ETHER △
Procedure Turn NA GP 3.00° TCH 40					*LNAV only.			
2.7 NM					3.5 NM	4.1 NM	5.4 NM	
CATEGORY	A		B		C		D	
LPV DA			2601-1		250 (300-1)			
LNAV/DA VNAV			2649-1		298 (300-1)			
LNAV MDA	2940-1		589 (600-1)		2940-1½ 589 (600-1½)		2940-1¾ 589 (600-1¾)	
CIRCLING	2940-1		589 (600-1)		3120-2¼ 769 (800-2¼)		3120-2½ 769 (800-2½)	



REIL Rwy 6 and 24
MIRL Rwy 6-24

SW-3, 22 JAN 2026 to 19 FEB 2026

SW-3, 22 JAN 2026 to 19 FEB 2026