

WAAS CH 56415 W30A	APP CRS 298°	Rwy Idg 5320 TDZE 919 Apt Elev 919
--	------------------------	---

RNAV (GPS) RWY 30

ANDERSON RGNL (AID)


RNP APCH

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). When local altimeter setting not received, use Muncie altimeter setting and increase all DA 32 feet and all MDA 40 feet, and increase LPV and LNAV/VNAV all Cals and LNAV Cat C visibility ¼ mile. Inoperative table does not apply.
Rwy 30 helicopter visibility reduction below ¾ SM NA.

MALSF

MISSED APPROACH:
Climb to 3000 direct
WARMU and hold.

AWOS-3 128.55	INDIANAPOLIS APP CON 120.65 317.8	ANDERSON TOWER ★ 126.0 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-------------------------	---	--	-------------------------	-------------------------

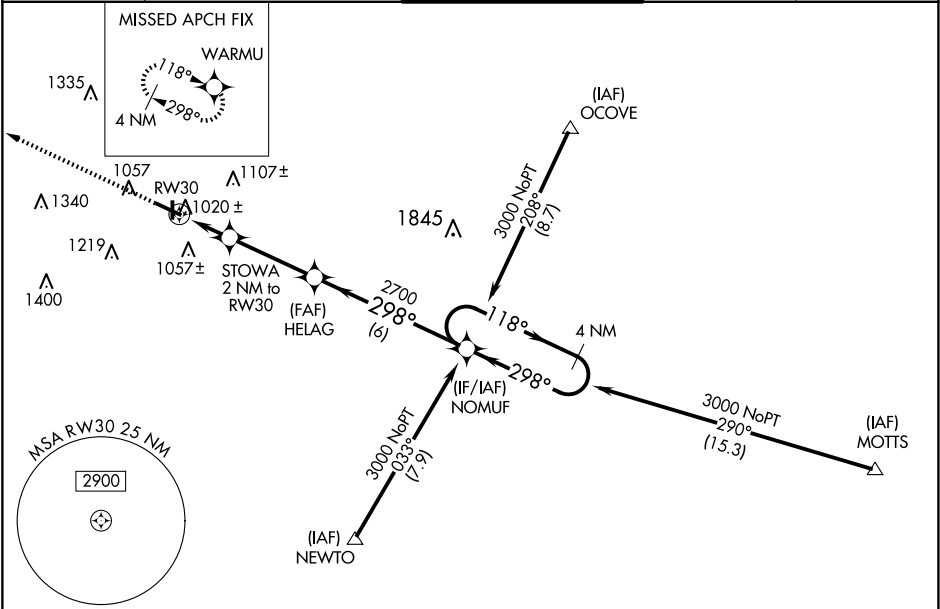

ELEV 919	TDZE 919
-----------------	-----------------

REIL Rwy 12
MIRL Rwy 12-30 and 18-36 **0**

3000 WARMU

*LNAV only

STOWA 2 NM to RW30

1 NM to RW30

1600*

HELAG

NOMUF

4 NM Holding Pattern

118° → 3000

← 298°

GP 3.00° TCH 48

1 NM 1 NM 3.4 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	1234-1	315 (400-1)		
LNAV/VNAV DA	1367-1½	448 (500-1½)		
LNAV MDA	1300-1	381 (400-1)		1300-1¼ 381 (400-1¼)
CIRCLING	1360-1 441 (500-1)	1400-1 481 (500-1)	1520-1¾ 601 (700-1¾)	1520-2 601 (700-2)