

LOC/DME I-ANE
111.15
Chan **48 (Y)**

APP CRS
269°

Rwy Ldg **5000**
TDZE **910**
Apt Elev **912**

ILS or LOC RWY 27

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)


DME required. RADAR required for procedure entry at BLAYN.

VDP NA when using Crystal altimeter setting. When local altimeter setting not received, use Crystal altimeter setting and increase S-ILS 27 DA to 1131 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Crystal altimeter setting, increase S-LOC 27 Cat C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct GEP VORTAC and hold, continue climb-in-hold to 2700.

ATIS 120.625	MINNEAPOLIS APP CON 126.5 335.65	ANOKA TOWER★ 132.4 (CTAF) 0	GND CON 121.85	UNICOM 122.95
------------------------	--	---------------------------------------	--------------------------	-------------------------

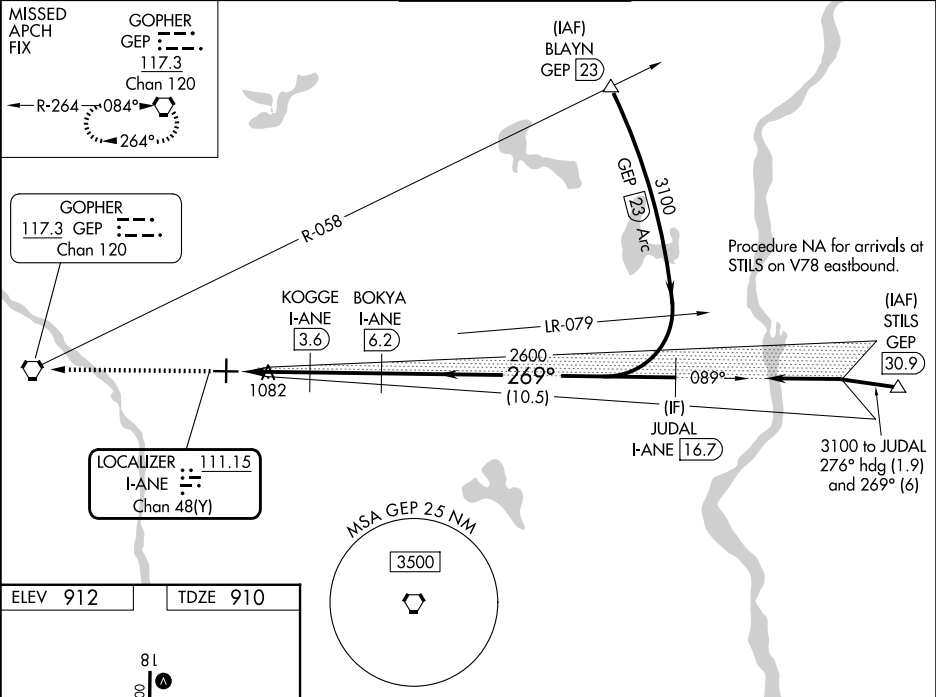

ELEV 912	TDZE 910
81 4855 X 100 5000 X 100 TWR 36 269° 2700 GEP Use I-ANE DME when on the localizer course. JUDAL I-ANE (16.7) BOKYA I-ANE (6.2) KOGGE I-ANE (3.6) I-ANE (1) I-ANE (2.2) 1780 2600 2600 269° 3100 GS 3.00° TCH 49	
CATEGORY A B C D	
S-ILS 27 1110-½ 200 (200-½)	
S-LOC 27 1340-½ 430 (500-½) 1340-¾ 430 (500-¾)	
CIRCLING 1400-1 488 (500-1) 1420-1½ 508 (600-1½) 1580-2 668 (700-2)	