

VORTAC GEP

117.3

Chan 120

APP CRS

084°

Rwy Ldg

5000

TDZE

910

Apt Elev

912

VOR RWY 9

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)

When local altimeter setting not received, use Crystal altimeter setting: increase all MDA 40 feet and increase S-9 visibility Cat C/D ¼ SM and Circling Cat D ¼ SM. VDP NA when using Crystal altimeter setting.

MISSED APPROACH: Climbing left turn to 3000 direct GEP VORTAC and hold.

ATIS

120.625

MINNEAPOLIS APP CON

126.5 335.65

ANOKA TOWER★


132.4 (CTAF) 0

GND CON

121.85

UNICOM

122.95

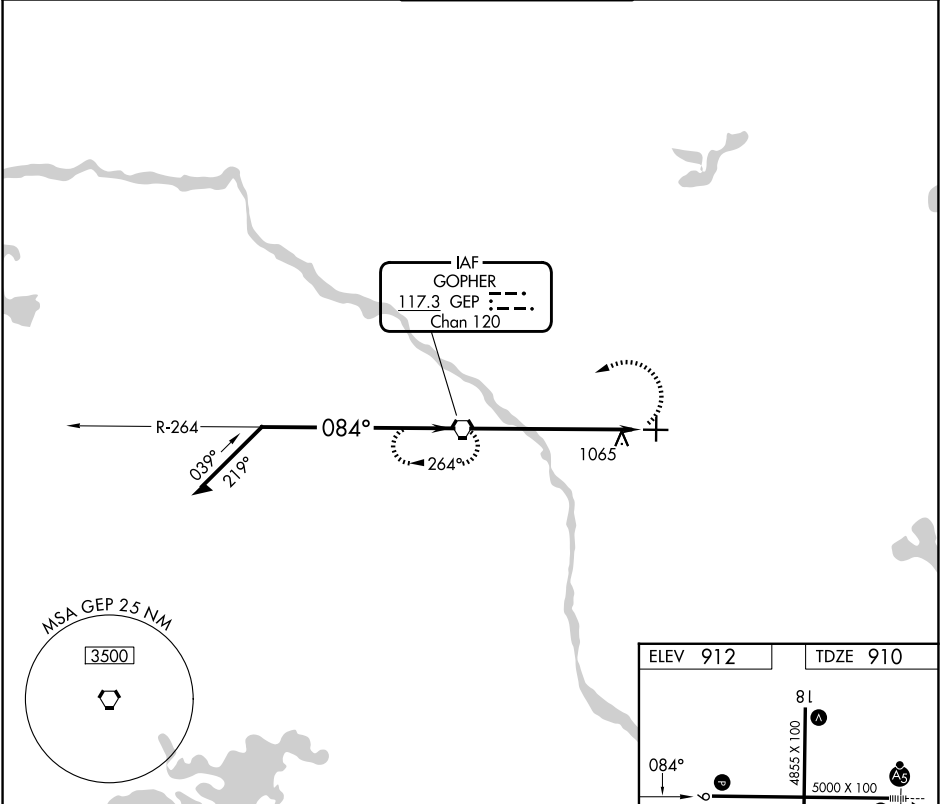

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).

Remain within 10 NM

3000

264°

084°

3000

2.97°

TCH 45

5 NM

1.5 NM

3000

GEP

GEP 5

GEP 6.5

ELEV 912

TDZE 910

81

084°

4855 X 100

5000 X 100

271

TWR

36

HIRL Rwy 9-27 0

MIRL Rwy 18-36 0

REIL Rws 9, 18 and 36 0

FAF to MAP 6.5 NM

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

CATEGORY	A	B	C	D
S-9	1400-1	490 (500-1)	1400-1⅓	490 (500-1⅓)
CIRCLING	1400-1	488 (500-1)	1460-1½ 548 (600-1½)	1580-2 668 (700-2)