


VOR/DME FFM 110.4 Chan 41	APP CRS 115°	Rwy Ldg 5639 TDZE 1182 Apt Elev 1183
---	------------------------	---

VOR RWY 13
FERGUS FALLS RGNL (FFM)

NA When local altimeter setting not received, use Elbow Lake altimeter setting and increase all MDAs 60 feet; increase Circling Cat C/D visibility $\frac{1}{4}$ SM. EBABY fix minimums increase S-13 Cat C/D and Circling Cat C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3000 then left turn direct FFM VOR/DME and hold.

AWOS-3PT 119.05	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

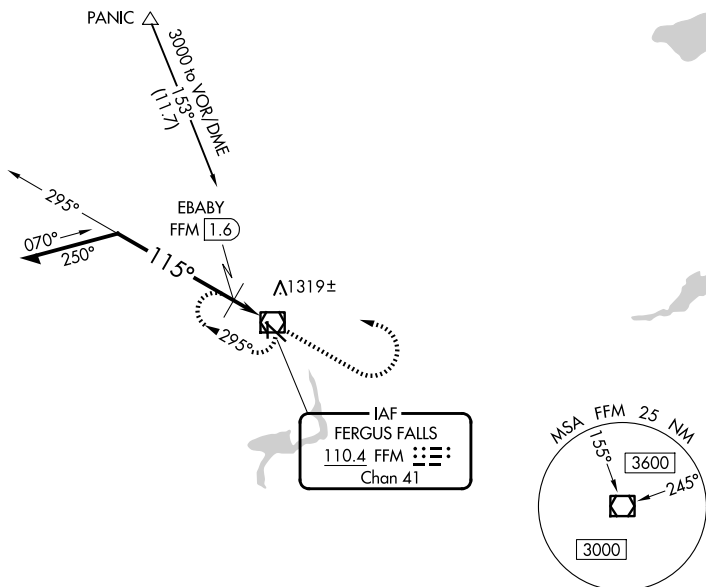

NC-1, 22 JAN 2026 to 19 FEB 2026


VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 52).

Remain
within 10 NM

3000		FFM
------	--	-----

*1700 when using Elbow Lake altimeter setting.

CATEGORY	A	B	C	D
S-13	1640-1	458 (500-1)	1640-1 $\frac{3}{8}$	458 (500-1 $\frac{3}{8}$)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1 $\frac{3}{4}$ 637 (700-1 $\frac{3}{4}$)	1940-2 $\frac{1}{2}$ 757 (800-2 $\frac{1}{2}$)
EBABY FIX MINIMUMS				
S-13	1580-1	398 (400-1)	1580-1 $\frac{1}{8}$	398 (400-1 $\frac{1}{8}$)
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1 $\frac{3}{4}$ 637 (700-1 $\frac{3}{4}$)	1940-2 $\frac{1}{2}$ 757 (800-2 $\frac{1}{2}$)

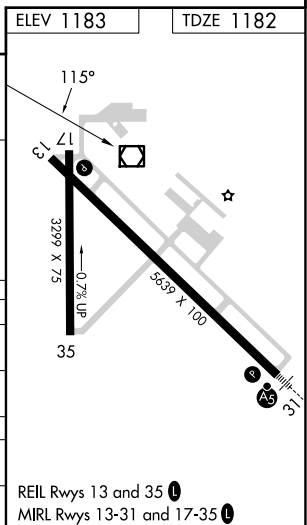

FERGUS FALLS, MINNESOTA
Amdt 1B 24MAR22

FERGUS FALLS RGNL (FFM)
VOR RWY 13

46°17'N-96°09'W