

WAAS CH 86311 W28A	APP CRS 282°	Rwy Idg 5499 TDZE 911 Apt Elev 914
--	------------------------	---

RNAV (GPS) RWY 28
GENESEE COUNTY (GVQ)


V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rochester altimeter setting: increase LPV DA to 1263 feet and visibility ¼ SM all Cats; increase LNAV/VNAV DA to 1466 feet and visibility ½ SM all Cats; increase all MDA 120 feet and visibility LNAV Cat C ¼ SM and Circling Cats C and D ½ SM. Baro-VNAV and VDP NA when using Rochester altimeter setting. For inop MALSIR increase LNAV Cat D visibility to 1¼ mile. For inop MALSIR, when using Rochester altimeter setting increase LPV visibility all Cats to 1¼ mile.

MALSR




MISSED APPROACH: Climb to 3300 direct WAVRU and left turn via 162° track to YAVUD and left turn via 063° track to POCZI and hold.

AWOS-3PT 127.525	ROCHESTER APP CON 123.7 322.3	CLNC DEL 121.8	UNICOM 122.7 (CTAF) 0
----------------------------	---	--------------------------	--

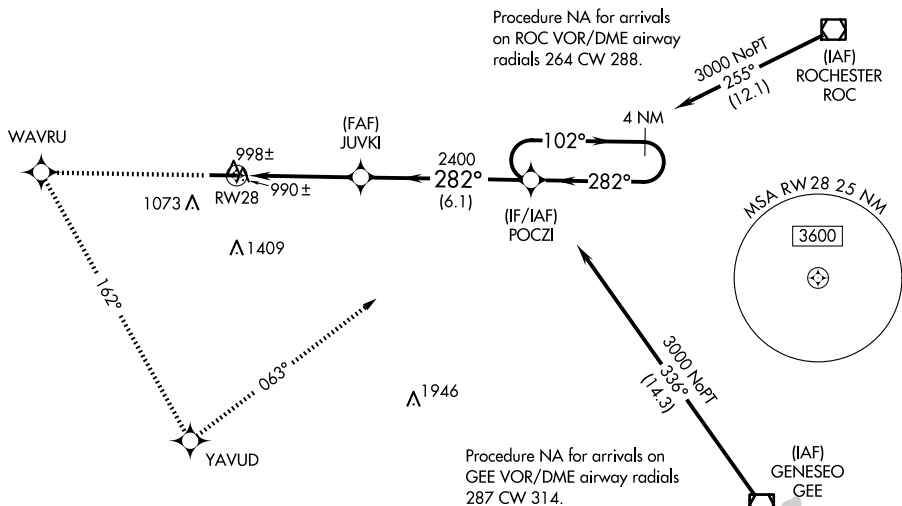2062 Δ

ELEV 914		TDZE 911
----------	--	----------



3300 ↑	WAVRU ✦	tr 162°	YAVUD ✦	tr 063°	POCZI ✦	4 NM Holding Pattern
* LNAV only. POCZI 102° → 3000 ← 282° JUVKI 282° 2400 GP 3.00° TCH 56 0.9 3.6 NM 6.1 NM						
CATEGORY	A		B		C	D
LPV DA			1161-½ 250 (300-½)			
LNAV/ VNAV	DA		1364-1 453 (500-1)			
LNAV MDA	1260-½ 349 (400-½)					1260-1 349 (400-1)
CIRCLING	1380-1 466 (500-1)		1720-2¼ 806 (900-2¼)		1720-2½ 806 (900-2½)	

RNAV (GPS) RWY 28