

WAAS CH 72713 W27A	APP CRS 268°	Rwy Idg 5100 TDZE 925 Apt Elev 926
--	------------------------	---

RNAV (GPS) RWY 27
NORTHEAST OHIO RGNL (HZY)

T

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct NOJWE and hold.

ASOS 118.325	BUFFALO APP CON ★ 121.0	UNICOM 122.8 (CTAF)	123.3 0
------------------------	-----------------------------------	-------------------------------	----------------

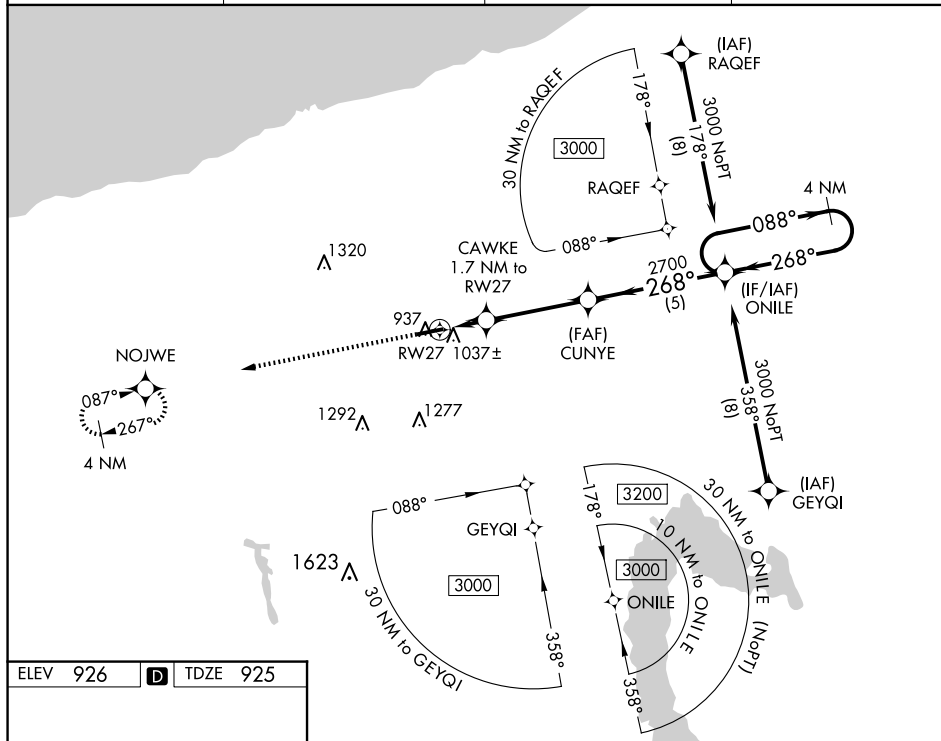


Diagram illustrating the CUNY 2700° holding pattern. The pattern is defined by a 1.4 NM radius from the 2700 MSL fix. Key distances include 1.7 NM to CAWKE, 3.7 NM to the next turn, and 5 NM to the next fix. The pattern is 4 NM wide and 3000 MSL high. The holding pattern is 4 NM wide and 3000 MSL high. The holding pattern is 4 NM wide and 3000 MSL high.

CATEGORY	A	B	C	D
LPV DA	1184-7/8	259 (300-7/8)		
RNAV/VNAV DA	1198-7/8	273 (300-7/8)		
RNAV MDA	1300-1	375 (400-1)		
CIRCLING	1340-1 414 (500-1)	1380-1 454 (500-1)	1500-1 1/2 574 (600-1 1/2)	1580-2 654 (700-2)