

WAAS CH 45618 W11A	APP CRS 113°	Rwy Idg 6200 TDZE 2976 Apt Elev 3004
--	------------------------	---

RNAV (GPS) RWY 11
ODESSA-SCHLEMEYER FLD (ODO)

Y Circling to Rwy 16 and 20 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA S of Rwy 2 and 34. When local altimeter setting not received use Midland Infr Air and Space Port altimeter setting and increase all DA 41 feet and all MDA 60 feet and increase LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C and D and Circling Cat C visibility 1/4 mile. VDP NA with Midland Infr Air and Space Port altimeter setting. Baro-VNAV NA when using Midland Infr Air and Space Port altimeter setting.

MALS




MISSED APPROACH:
Climb to 5000 direct
JEMBI and hold.

ASOS 119.275	MIDLAND APP CON ★ 124.6 256.875	CLNC DEL 121.7	UNICOM 123.0 (CTAF) 0
------------------------	---	--------------------------	--


MISSED APCH FIX




A 4049

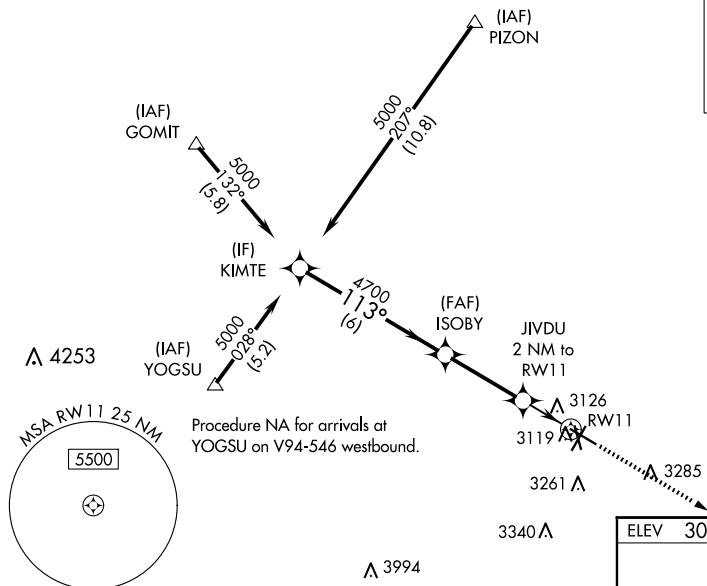

ELEV	3004		TDZE	2976
------	------	--	------	------

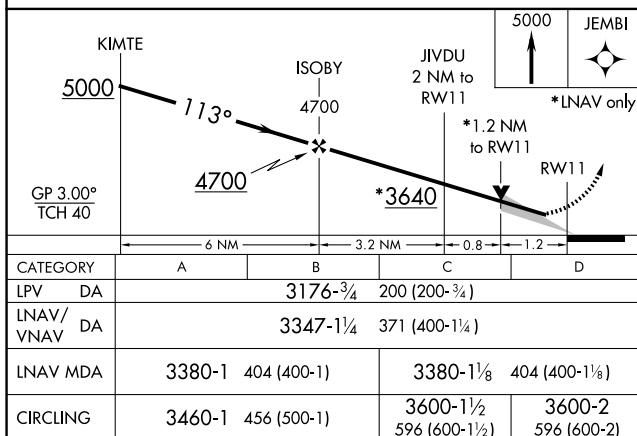

CATEGORY		A	B	C	D
LPV	DA	3176- ³ / ₄		200 (200- ³ / ₄)	
INAV/ VNAV	DA	3347-1 ¹ / ₄		371 (400-1 ¹ / ₄)	
INAV MDA		3380-1	404 (400-1)	3380-1 ¹ / ₈	404 (400-1 ¹ / ₈)
CIRCLING		3460-1	456 (500-1)	3600-1 ¹ / ₂ 596 (600-1 ¹ / ₂)	3600-2 596 (600-2)

MIRL Rwy 2-20, 11-29, and 16-34 **L**