WAAS CH 86318 W29A	APP CRS 293°	Rwy ldg 6200 TDZE 2980 Apt Elev 3004

RNAV (GPS) RWY 29
ODESSA-SCHLEMEYER FLD (ODO)

RNP APCH.

Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 43°C. Circling NA south of Rwys 2 and 34. When local altimeter setting not received use Midland Intl Air and Space Port altimeter setting and increase all DAs 41 feet and all MDAs 60 feet and increase LNAV Cats C and D visibility ⅛ SM, Circling Cat C visibility ¼ SM. VDP NA with Midland Intl Air and Space Port altimeter setting.

MALS

MISSED APPROACH: Climb to 5000 direct KIMTE and hold.

ASOS	MIDLAND APP CON ★	CLNC DEL	UNICOM
119.275	124.6 256.875	121.7	123.0 (CTAF) L

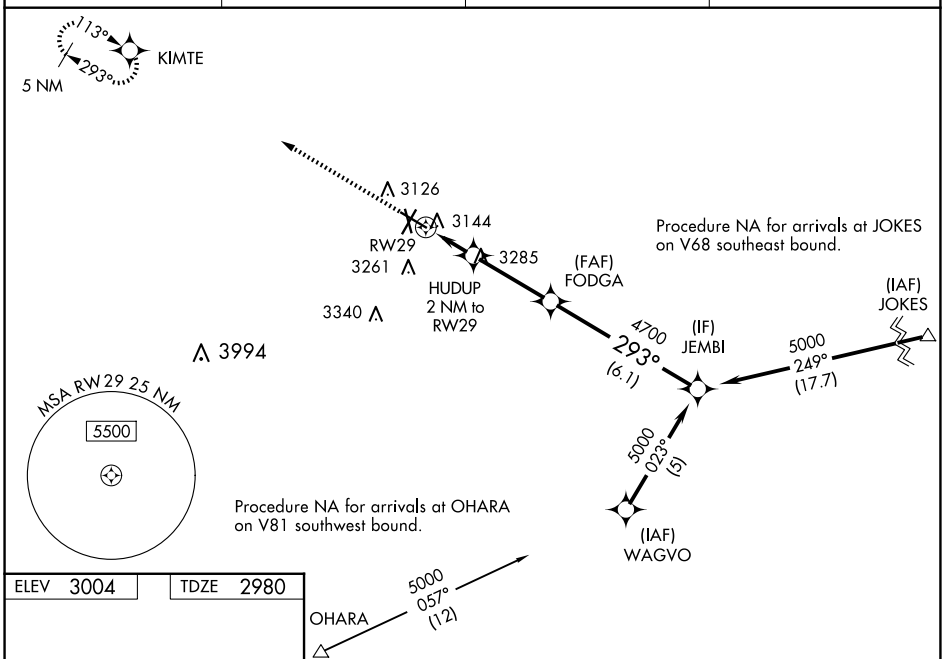

ELEV 3004 TDZE 2980

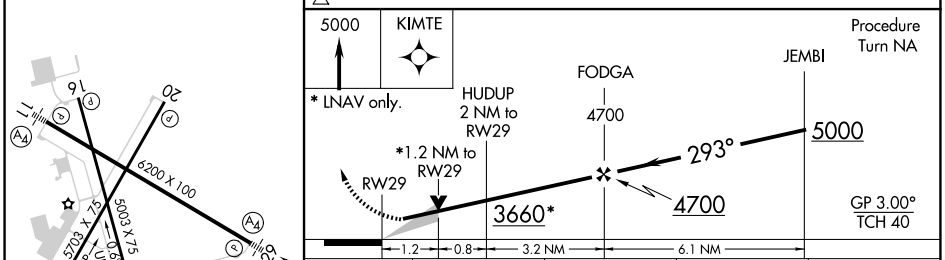

CATEGORY	A	B	C	D
LPV DA	3180-¾ 200 (200-¾)			
LNAV/VNAV DA	3414-1½ 434 (500-1½)			
LNAV MDA	3400-1 420 (500-1)		3400-1¼ 420 (500-1¼)	
CIRCLING	3460-1 456 (500-1)		3600-1½ 596 (600-1½)	3600-2 596 (600-2)

MIRL Rwys 2-20, 11-29, and 16-34 L

SC-3, 22 JAN 2026 to 19 FEB 2026
SC-3, 22 JAN 2026 to 19 FEB 2026