

WAAS CH 56513 W04A	APP CRS 042°	Rwy Ldg TDZE Apt Elev	7099 158 158
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

ROCKY MOUNT/WILSON RGNL (RWI)

RNP APCH - GPS.


▼

Baro-VNAV and VDP NA when using GWW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use GWW altimeter setting and increase LPV DA to 467 feet; increase LNAV/VNAV DA to 601 feet and all visibilities ¼ SM, increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat C visibilities ¼ SM. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM. For inop ALS when using GWW altimeter setting, increase LPV all Cats visibility to ¾ SM.

MALSR

MISSED APPROACH:
Climb to 2500 direct
FENIM and hold.

ASOS 118.875	WASHINGTON CENTER 123.85 279.65	UNICOM 123.05 (CTAF) ①
------------------------	---	----------------------------------

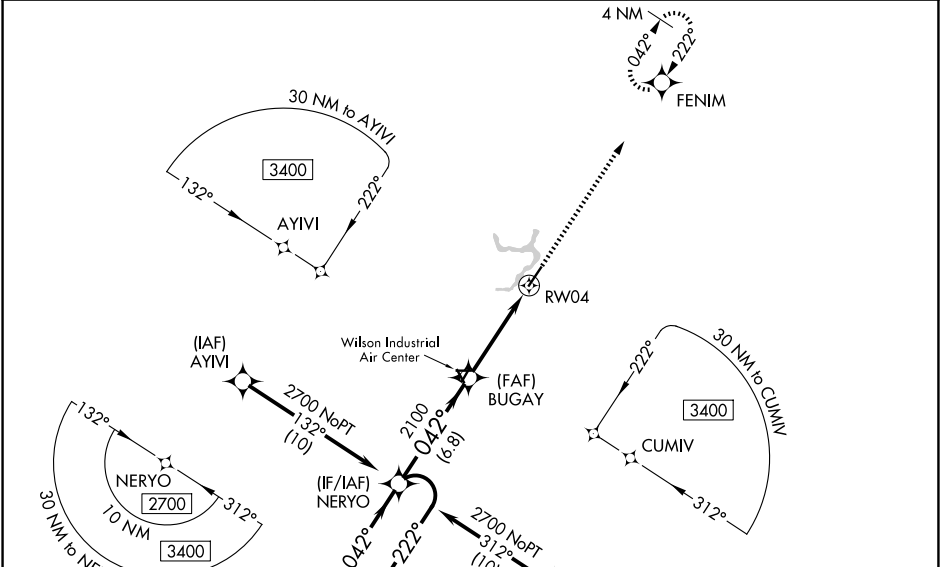

ELEV 158 D TDZE 158

4 NM Holding Pattern

VGSIs and RNAV glidepaths not coincident (VGSIs Angle 3.00/TCH 41).

2500 FENIM

NERYO

BUGAY

2100

1.1 NM to RW04

RW04

GP 3.00° TCH 56

6.8 NM

4.8 NM

1.1

CATEGORY	A	B	C	D
LPV DA		408-½	250 (300-½)	
LNAV/VNAV DA		542-⅝	384 (400-⅝)	
LNAV MDA	560-½	402 (500-½)	560-¾	402 (500-¾)
CIRCLING	600-1 442 (500-1)	620-1 462 (500-1)	720-1½ 562 (600-1½)	740-2 582 (600-2)

REIL Rwy 22 ①

HIRL Rwy 4-22 ①