

WAAS CH 61303 W27A	APP CRS 272°	Rwy Ldg TDZE 617 Apt Elev 620
--	------------------------	---

RNAV (GPS) RWY 27


LANSING MUNI(IGQ)

▼
▲


Baro-VNAV NA when using Chicago Midway Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Rwy 27 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. VDP NA when using Chicago Midway Intl altimeter setting. When local altimeter setting not received, use Chicago Midway Intl altimeter setting: increase LPV DA to 1058 and LNAV/VNAV DA to 1114 and all MDA 60 feet. Circling Rwy 9 NA at night.


MISSED APPROACH:
Climb to 2400 direct
UYELO and hold.

AWOS-3PT 124.925	CHICAGO APP CON 128.2 285.6	UNICOM 122.7 (CTAF) 0
----------------------------	---------------------------------------	---------------------------------

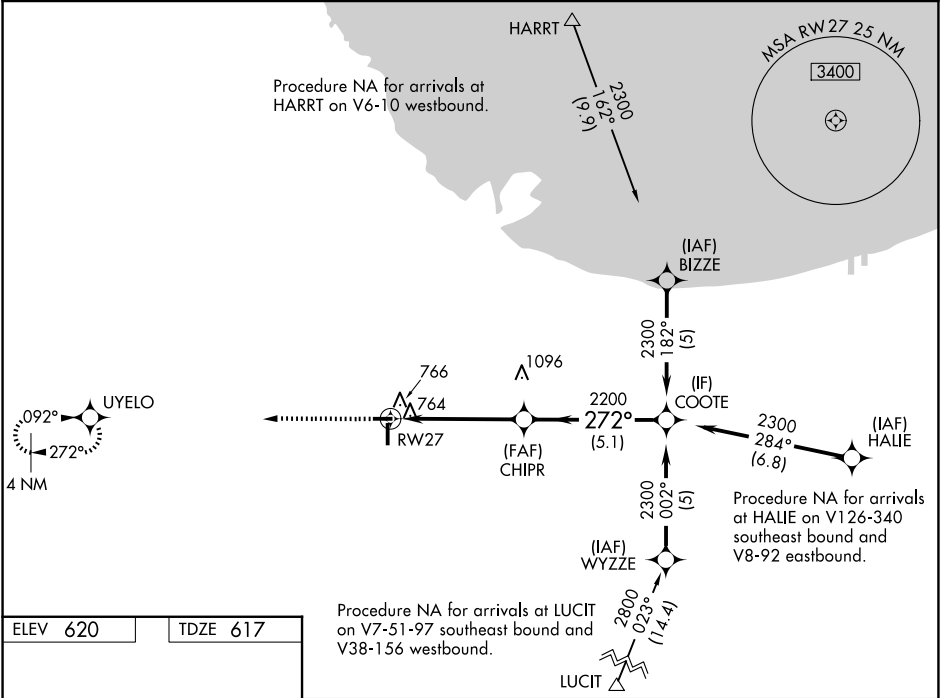

ELEV 620	TDZE 617
----------	----------

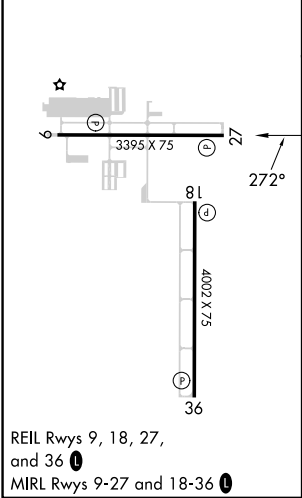

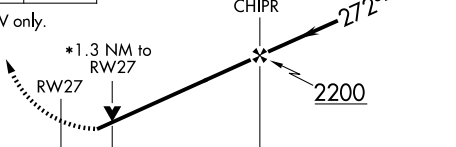2400		UYELO		COOTE	
					
*LNAV only.					
					
CATEGORY		A		B	
LPV DA		1016-1½ 399 (400-1½)		NA	
LNAV/VNAV DA		1072-1¾ 455 (500-1¾)		NA	
LNAV MDA		1080-1 463 (500-1)		NA	
CIRCLING		1140-1 520 (600-1)		NA	

GP 3.00°
TCH 40

EC-3, 22 JAN 2026 to 19 FEB 2026

EC-3, 22 JAN 2026 to 19 FEB 2026