

MAYNR THREE DEPARTURE (RNAV)

**TOP ALTITUDE:
ASSIGNED BY ATC**




RNAV 1 - DME/DME/IRU or GPS.
From SLIPT to MAXIM: RNAV 1- GP
From SLIPT to CANOA: RNAV 1- G

RADAR required for non-GPS equipped aircraft.
RADAR required.

MIAMI DEP CON
126.05 251.1
ATIS
120.55
GND CON
121.9
POMPANO BEACH
125.4 (CTAF)

TAKEOFF MINIMUMS
Rwys 6, 10, 15, 24, 28, 33: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

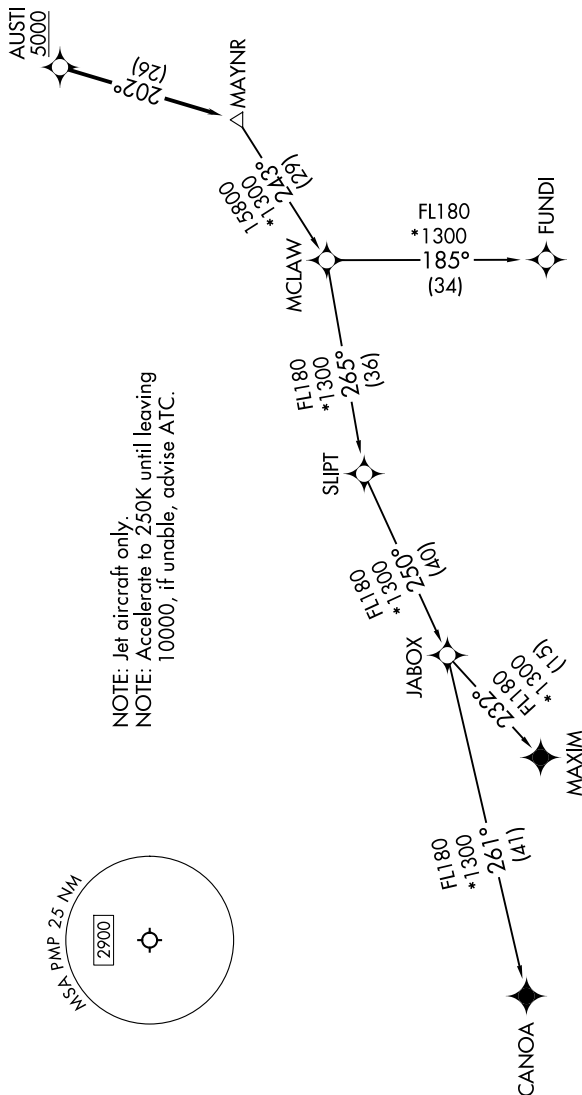

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

MAYNR THREE DEPARTURE (RNAV)

(MAYNR3.MAYNR) 31OCT24

POMPANO BEACH, FLORIDA
POMPANO BEACH AIRPARK (PMP)