

WAAS CH 82124 W01A	APP CRS 013°	Rwy Idg TDZE 817 Apt Elev 817	5003
--	------------------------	---	-------------

RNAV (GPS) RWY 1

DOUGLAS HUNTER FLD (1M5)

RNP APCH.


▼

▲

Baro-VNAV NA when using Bowling Green altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Bowling Green altimeter setting and increase LPV DA to 1180 and all visibilities ⅓ mile; increase all LNAV/VNAV DA to 1210 and all visibilities ¼ mile; increase all MDA 100 feet and increase LNAV Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct EDROY and hold.

AWOS-3PT 118.175	NASHVILLE APP CON 119.35 372.0	UNICOM 122.975 (CTAF) 0
----------------------------	--	-----------------------------------

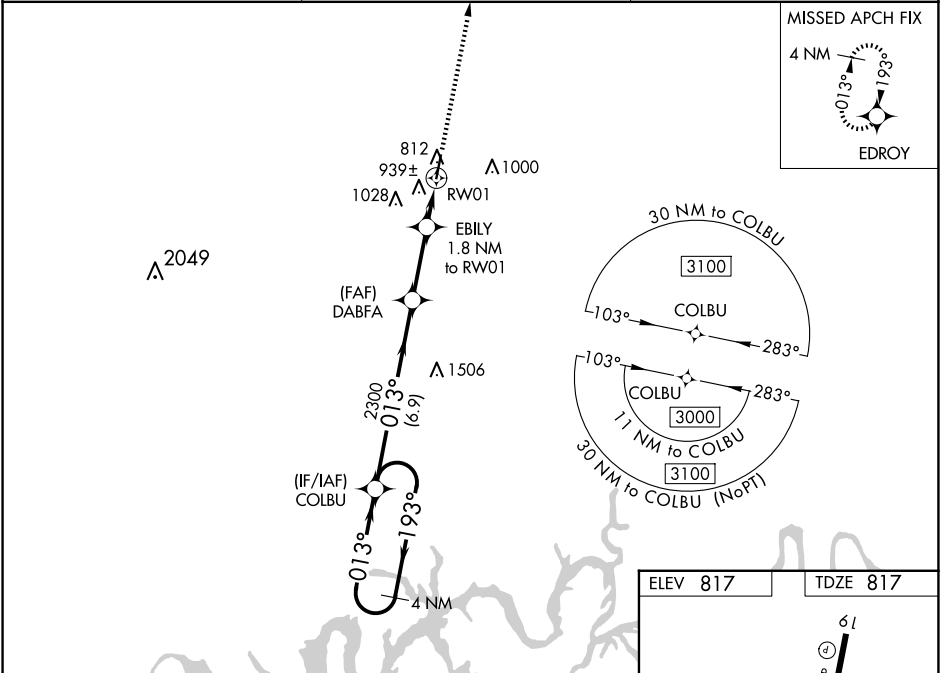

4 NM Holding Pattern

COLBU

3000

193°

013°

013°

GP 3.00° TCH 57

2300

6.9 NM

2.7 NM

1.8 NM

DABFA

2300

EBILY 1.8 NM to RW01

RW01

*1440

*LNAV only.

3000

EDROY

VGSI and RNAV glidepath not coincident.

CATEGORY	A	B	C	D
LPV DA	1090-1 273 (300-1)			
LNAV/VNAV DA	1120-1 303 (400-1)			
LNAV MDA	1200-1 383 (400-1)		1200-1½ 383 (400-1½)	

