


WAAS CH 88239 W05B	APP CRS 047°	Rwy Ldg TDZE Apt Elev	5000 8 8
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) Y RWY 5
NAPLES MUNI (APF')

RNP APCH - GPS.		MISSED APPROACH: Climb to 500 then climbing right turn to 2100 direct EVRGD and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 50°C.			
ATIS 134.225	FORT MYERS APP CON★ 119.75 371.85 (W) 124.125 371.85 (E)	NAPLES TOWER★ 128.5 (CTAF) 0	GND CON 121.6

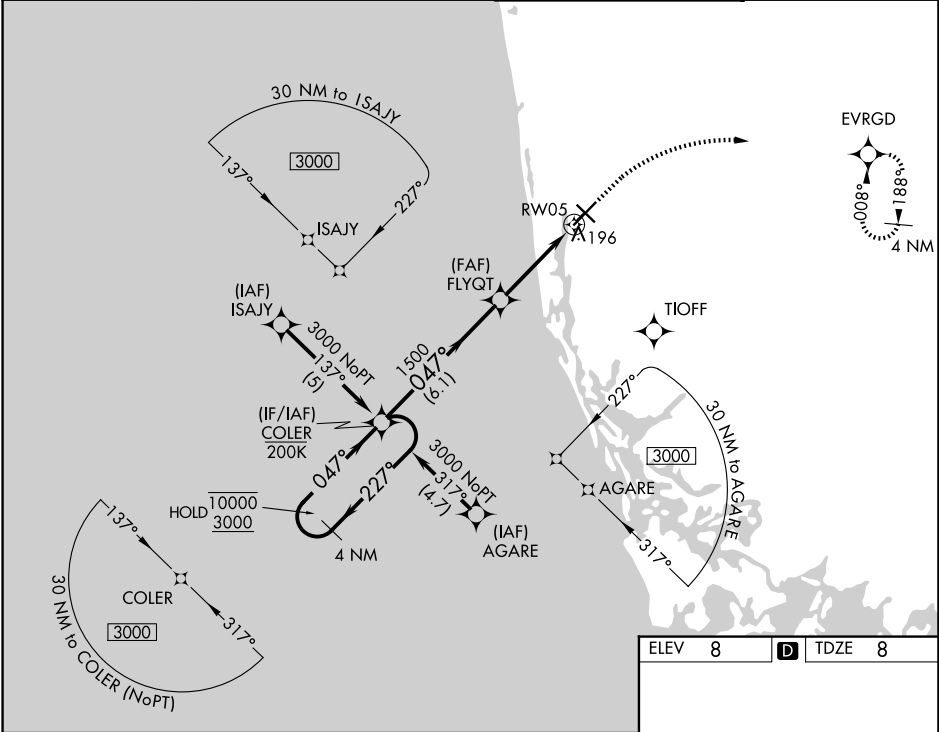

4 NM VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 31). Holding Pattern				500	2100	EVRGD
10000 ← 227° 3000 → 047°				1500	1.1 NM to RWY05	RWY05
GP 3.50° TCH 40				6.1 NM	2.8 NM	1.1 NM
CATEGORY	A	B	C	D		
LPV DA		278-1	270 (300-1)			
LNAV/VNAV DA		357-1	349 (400-1)			
LNAV MDA	460-1	452 (500-1)	460-1 3/8	452 (500-1 3/8)		
CIRCLING	500-1	492 (500-1)	620-1 3/4 612 (700-1 3/4)	760-2 1/2 752 (800-2 1/2)		

