

WAAS CH 56429 W14A	APP CRS 135°	Rwy Idg TDZE 678 Apt Elev 678
--	------------------------	---


RNAV (GPS) RWY 14

CHEROKEE COUNTY (J50)

Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase all DA to 1046 feet and increase LPV visibility ½ SM and LNAV/VNAV visibility ¼ SM; increase all MDA 120 feet and LNAV visibility Cat C ¾ SM, Circling visibility Cat C ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Nacogdoches altimeter setting.

MISSED APPROACH: Climb to 3100 direct NOPCI and hold.

AWOS-3 119.075	LONGVIEW APP CON* 128.75 379.15	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

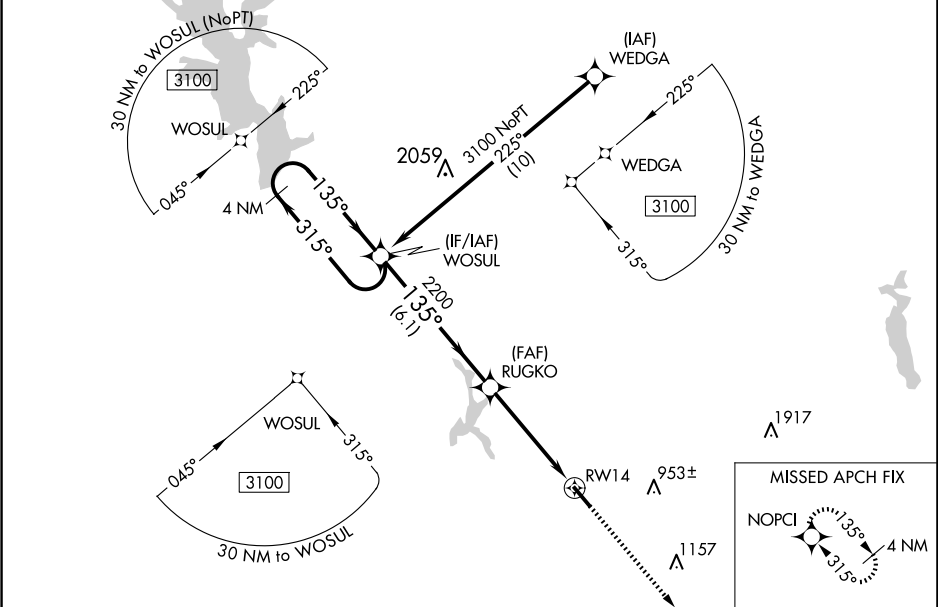

ELEV 678		TDZE 678	
4 NM Holding Pattern WOSUL		3100 NOPCI	
3100 ← 315° → 135°		*LNAV only.	
GP 3.00° TCH 30		RUGKO 2200	
6.1 NM		*1.2 NM to RW14	
3.5 NM		RW14	
1.2 NM		500x775	
CATEGORY		A	
LPV DA		928-1 250 (300-1)	
LNAV/VNAV DA		928-1 250 (300-1)	
LNAV MDA		1080-1 402 (500-1)	
CIRCLING		1080-1 402 (500-1)	
B		1080-1 402 (500-1)	
C		1080-1 402 (500-1)	
D		1080-1 402 (500-1)	
REIL Rwy 14 0		MIRL Rwy 14-32 0	