

WAAS CH 97540 W24A	APP CRS 238°	Rwy Idg TDZE 575 Apt Elev 575
--	------------------------	---

RNAV (GPS) RWY 24



PAGELAND (PYG)

NA

Baro-VNAV NA. Rwy 24 helicopter visibility reduction below $\frac{3}{4}$ SM NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 944 feet and all visibilities $\frac{1}{4}$ SM. Increase LNAV/VNAV DA to 986 feet and all visibilities $\frac{1}{2}$ SM. Increase all MDA 60 feet.

MISSED APPROACH:
Climb to 2400 direct
WITHE and hold.

EQY ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	(CTAF) 122.9
----------------------------	--	------------------------

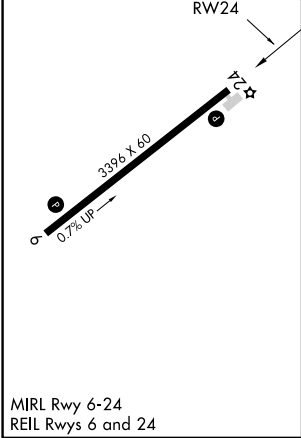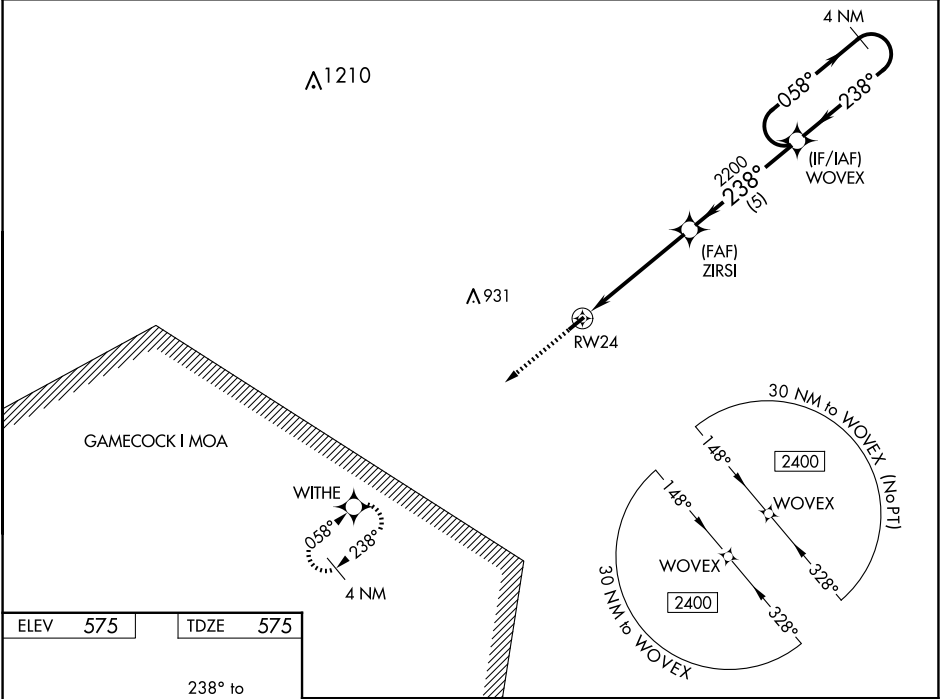

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE

2400

WITHE