WAAS CH 56440 W06A	APP CRS 058°	Rwy ldg 3396 TDZE 574 Apt Elev 575

RNAV (GPS) RWY 6
PAGELAND (PYG)

T A NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities ¼ SM. Increase all MDA 60 feet.

MISSED APPROACH: Climb to 2400 direct WOVEX and hold.

EQY ASOS	CHARLOTTE APP CON	(CTAF)
135.775	120.05 307.8	122.9

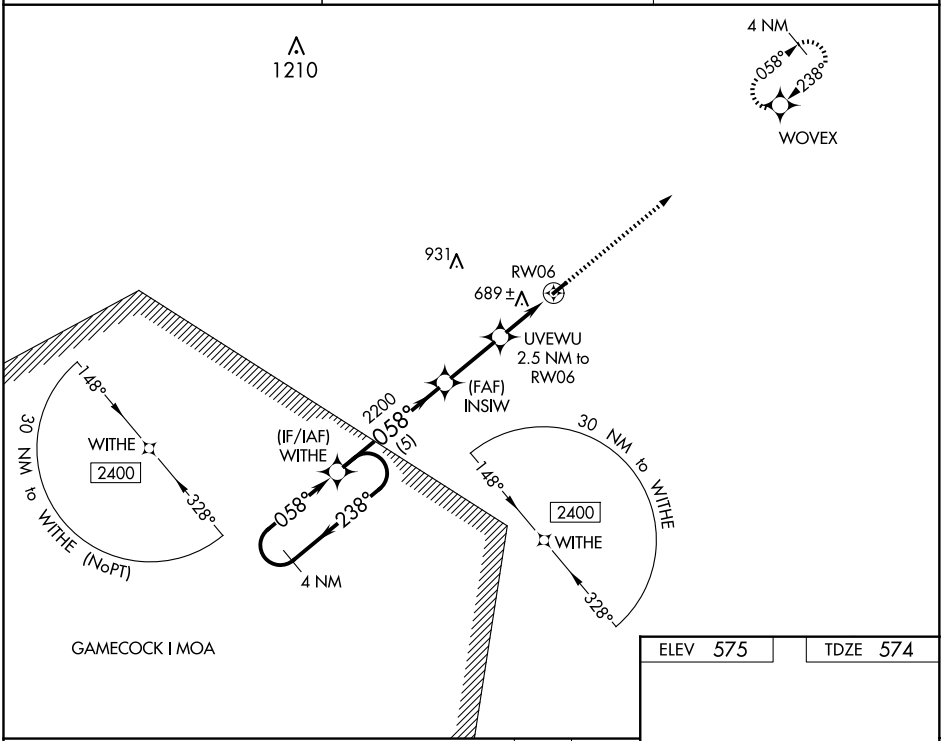

ELEV 575 TDZE 574

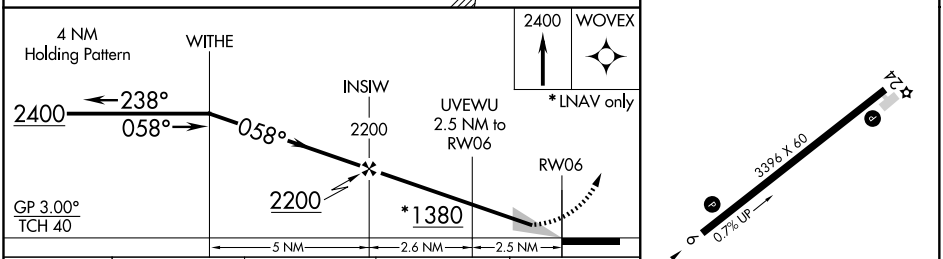

CATEGORY	A	B	C	D
LPV DA	889-1⅛ 315 (400-1⅛)		NA	
LNAV/VNAV DA	1085-1⅞ 511 (600-1⅞)		NA	
LNAV MDA	1020-1 446 (500-1)		NA	
C CIRCLING	1100-1⅞ 525 (600-1⅞)		NA	

MIRL Rwy 6
REIL Rwys 6 and 24

SE-2, 22 JAN 2026 to 19 FEB 2026

SE-2, 22 JAN 2026 to 19 FEB 2026