


WAAS CH 93742 W35A	APP CRS 353°	Rwy Ldg TDZE Apt Elev	5500 1409 1409
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 35
SIOUX COUNTY RGNL (SXX)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 4500 direct HALGA and hold, continue climb-in-hold to 4500.
Baro-VNAV and VDP NA when using LRJ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use LRJ altimeter setting: increase LPV DA to 1668 feet; increase LNAV/VNAV DA to 1718 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to ¾ SM. For inop ALS when using LRJ altimeter setting, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to 1 SM.		

AWOS-3P 120.075	SIOUX CITY APP CON ★ 124.6 307.0	UNICOM 122.7 (CTAF)
---------------------------	--	-------------------------------

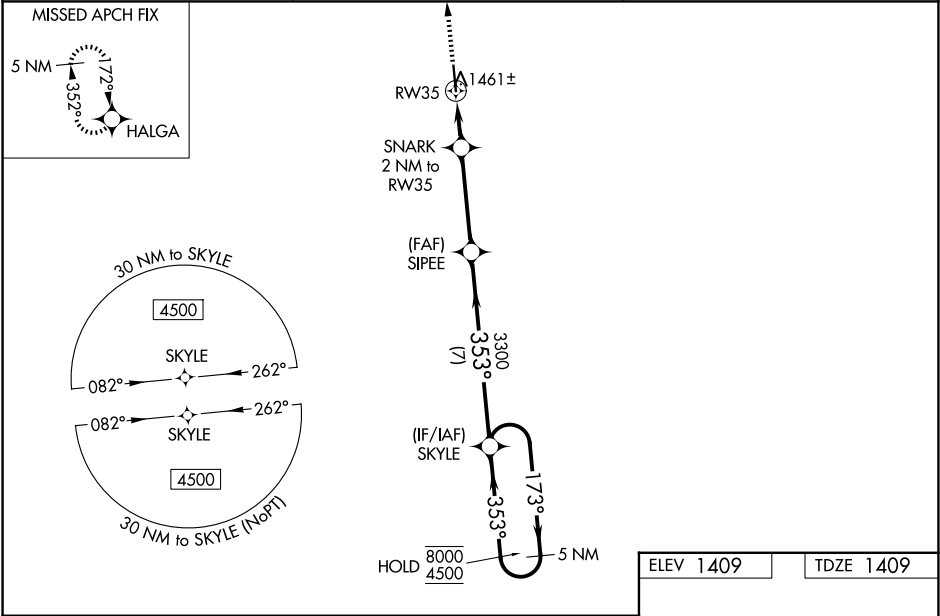

4500	HALGA	SNARK 2 NM to RW35	SIPEE 3300	SKYLE 5 NM Holding Pattern
0.9 NM	0.9 NM	1.2 NM	3.8 NM	7 NM
2100	3300	3300	8000	4500
GP 3.00°	TCH 40			
CATEGORY	A	B	C	D
LPV DA		1609-½	200 (200-½)	
LNAV/VNAV DA		1659-½	250 (300-½)	
LNAV MDA		1720-½	311 (400-½)	
CIRCLING	1820-1 411 (500-1)	2080-1 671 (700-1)	2080-2 671 (700-2)	2080-2¼ 671 (700-2¼)

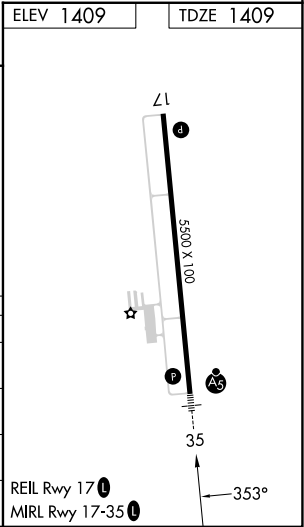

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026