WAAS CH 63103 W35A	APP CRS 355°	Rwy Ldg 7299 TDZE 2885 Apt Elev 2891

RNAV (GPS) RWY 35
GARDEN CITY RGNL (GCK)

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV Cats C/D visibility to ¾ SM, and LNAV Cats C/D visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 4700 direct WEMDI and hold.

ASOS	KANSAS CITY CENTER	GARDEN CITY TOWER*	GND CON	UNICOM
121.325	125.2 285.425	118.15 (CTAF) L 254.4	119.0 254.4	122.95

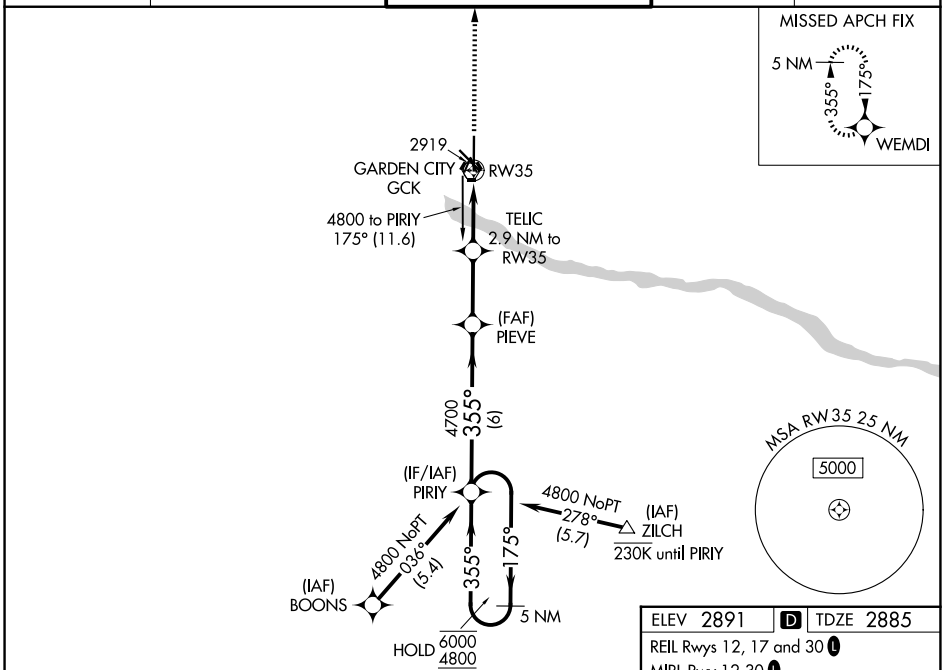

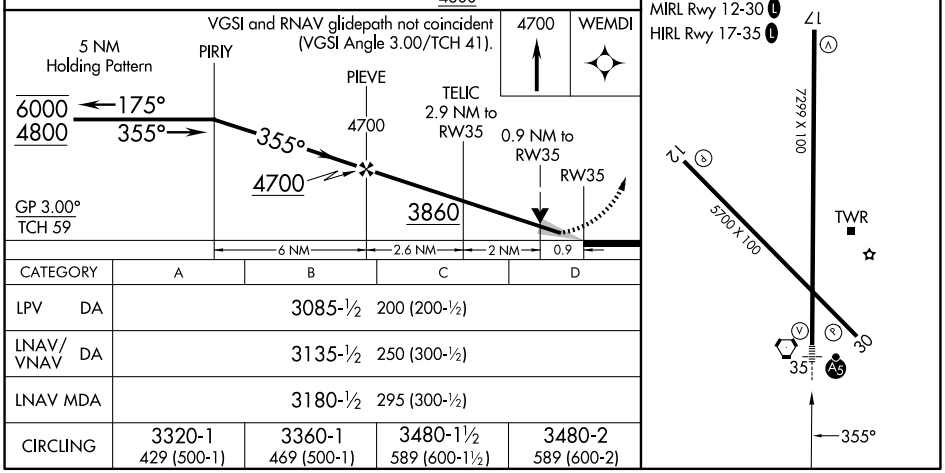

CATEGORY	A	B	C	D
LPV DA	3085-½ 200 (200-½)			
LNAV/VNAV DA	3135-½ 250 (300-½)			
LNAV MDA	3180-½ 295 (300-½)			
CIRCLING	3320-1 429 (500-1)	3360-1 469 (500-1)	3480-1½ 589 (600-1½)	3480-2 589 (600-2)

NC-2, 19 FEB 2026 to 19 MAR 2026
NC-2, 19 FEB 2026 to 19 MAR 2026