D-ATIS
118.0
CPDLC
SEATTLE DEP CON
119.2 284.7 (Rwys 34R/C/L) (N)
120.4 269.125 (Rwys 16L/C/R) (S)

TOP ALTITUDE: ASSIGNED BY ATC

NOTE: RADAR and DME required.

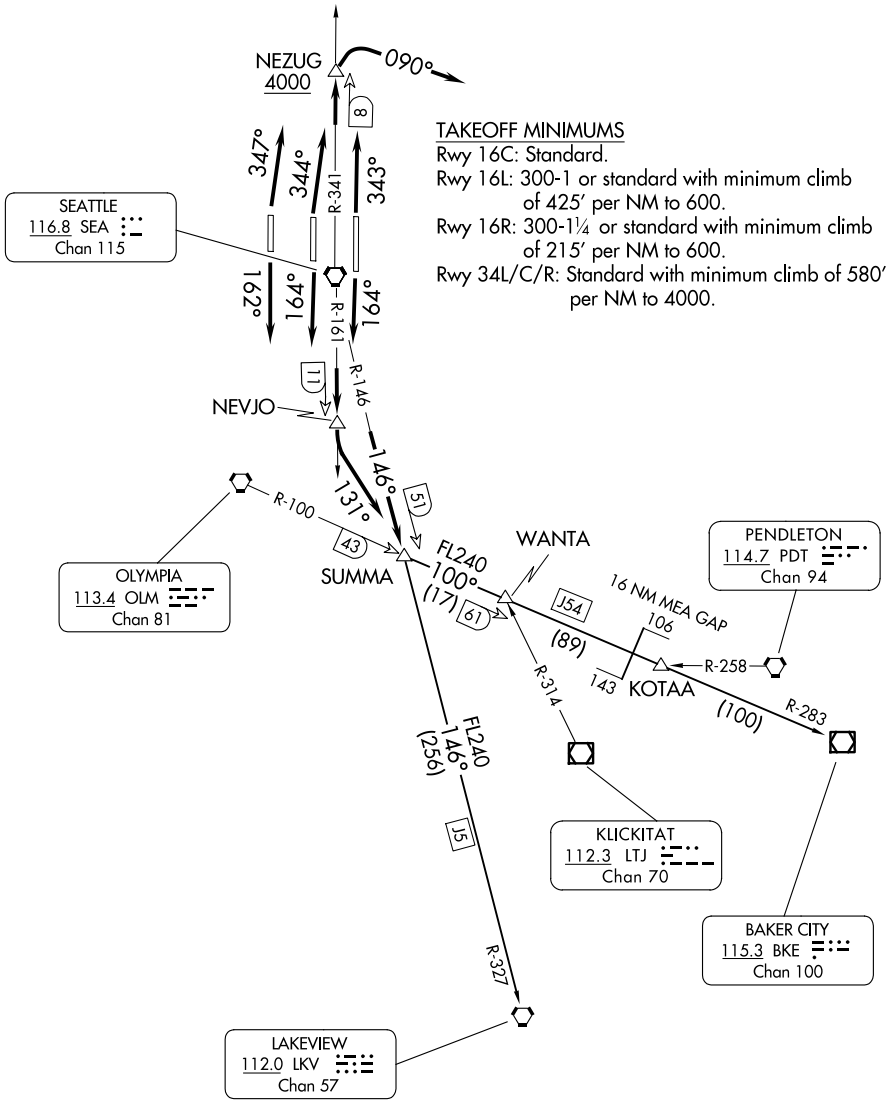

TAKEOFF MINIMUMS
Rwy 16C: Standard.
Rwy 16L: 300-1 or standard with minimum climb of 425′ per NM to 600.
Rwy 16R: 300-1¼ or standard with minimum climb of 215′ per NM to 600.
Rwy 34L/C/R: Standard with minimum climb of 580′ per NM to 4000.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

NW-1, 19 FEB 2026 to 19 MAR 2026