

RNAV (GPS) RWY 14

APCH CRS 141°	Rwy Idg 12,001 TDZE 5496 Arpt Elev 5550	AL-3188 [USAF]	TONOPAH TEST RANGE (KTNX)	
▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles. ** Circling not authorized W of Rwy 14-32.		ALSF-1 	MISSED APPROACH: Turn left climbing to 11,000 direct JADPU and hold, continue climb-in-hold to 11,000.	
AWOS 113.0	NELLIS CONTROL 119.35 254.4	SILVERBOW TOWER ★ 124.75 257.95 0		GND CON 127.25 335.5


DME/DME RNP-0.3 NA

When VGSI inop, procedure
NA at night.

When Rwy 32 VGSI inop,
circling to Rwy 32 NA at night.


Unlit terrain 5558' MSL, 200'
prior to Rwy 32 threshold, 200' left of centerline.
When VGSI inop, procedure NA at night.

USAF ONLY: When Rwy 14 VGSI inop, straight-in Rwy 14 authorized at night with MAJCOM A3 approval.


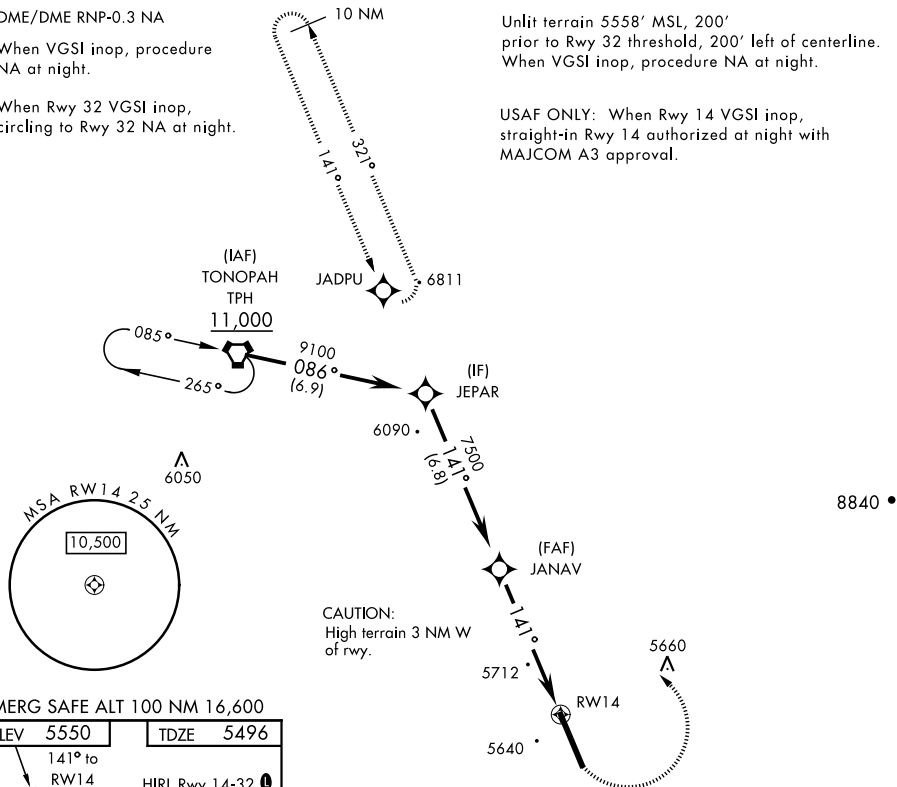


EMERG SAFE ALT 100 NM 16,600

ELEV	5550		TDZE	5496
------	------	--	------	------

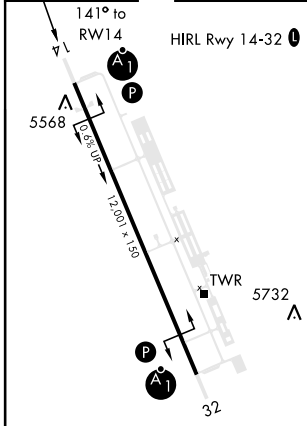

VGSI and descent angles
not coincident

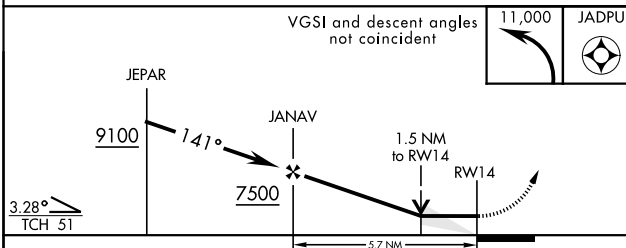

CATEGORY	A	B	C	D
INAV MDA *	5960/24 464 (500-½)		5960/50 464 (500-1)	
 CIRCLING **	6040-1 490 (500-1)		6040-1 ½ 490 (500-1 ½)	6100-2 550 (600-2)