


WAAS CH 82231 W11A	APP CRS 110°	Rwy Idg TDZE 482 Apt Elev 482
--	------------------------	---

RNAV (GPS) RWY 11

OLNEY-NOBLE (OLY)

RNP APCH.	▼ Baro-VNAV NA when using Evansville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use ▲ Evansville altimeter setting and increase all DAs 126 feet, MDAs 140 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D ¾ SM and Circling Cat C ¼ SM and Cat D ½ SM.	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FOYWU and hold.
-----------	---	---

AWOS-3 119.275	KANSAS CITY CENTER 124.3 269.15	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

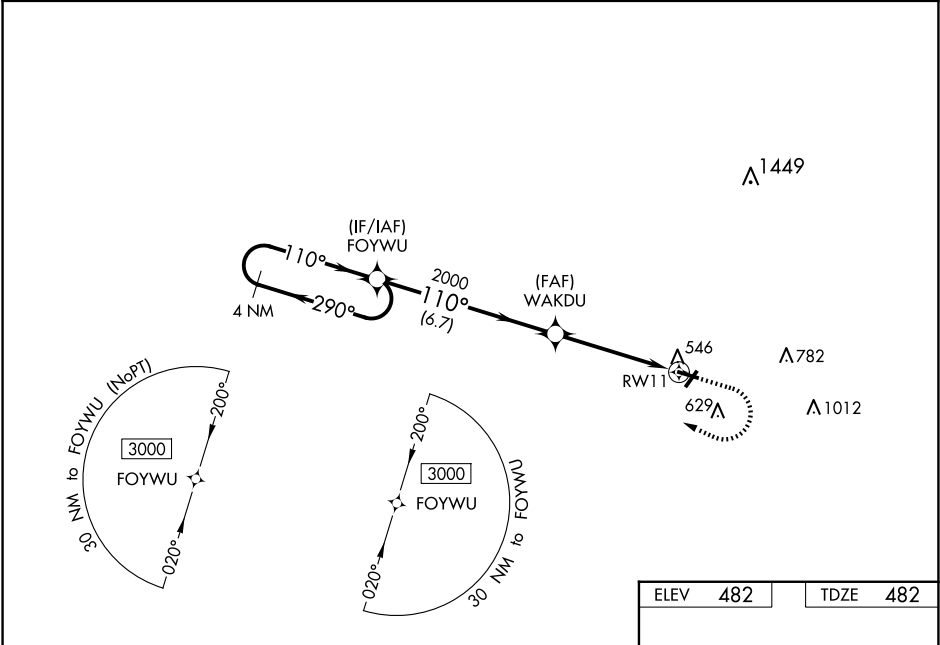

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).		1500	3000	FOYWU
4 NM Holding Pattern		↑	↷	✧
3000 ← 290° 110° →		FOYWU	WAKDU	RW11
GP 3.00° TCH 40		2000	2000	
6.7 NM		4.6 NM		
CATEGORY	A	B	C	D
LPV DA	732-1		250 (300-1)	
LNAV/VNAV DA	962-1½		480 (500-1½)	
LNAV MDA	920-1	438 (500-1)	920-1¼	438 (500-1¼)
✏ CIRCLING	960-1	478 (500-1)	960-1½ 478 (500-1½)	1180-2¼ 698 (700-2¼)

ELEV 482

TDZE 482

REIL Rwy 4 and 11 0

MIRL Rwy 4-22 and 11-29 0