

LOC/DME I-BYH 110.3 Chan 40	APP CRS 181°	Rwy ldg 11602 TDZE 250 Apt Elev 254
---	------------------------	--

ILS or LOC RWY 18

ARKANSAS INTL (BYH)

RADAR required for procedure entry. RNP APCH-GPS and DME required.




▽ Obtain local altimeter setting on CTAF, when not received, use Blytheville Muni altimeter setting and increase DA to 464 feet and all MDAs 20 feet.

△NA Circling NA east of Rwy 18-36.

MISSED APPROACH: Climb to 1900 then climbing left turn to 2500 direct GURLY and hold.

MEMPHIS CENTER
134.65 316.15

UNICOM
122.7 (CTAF) 0

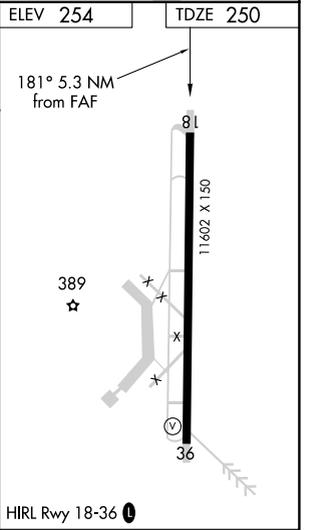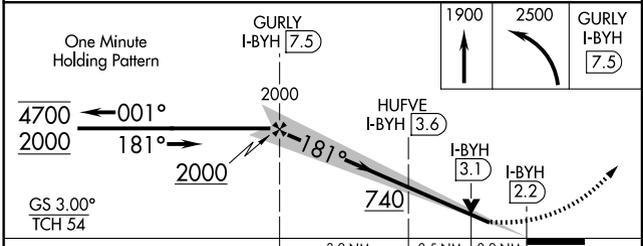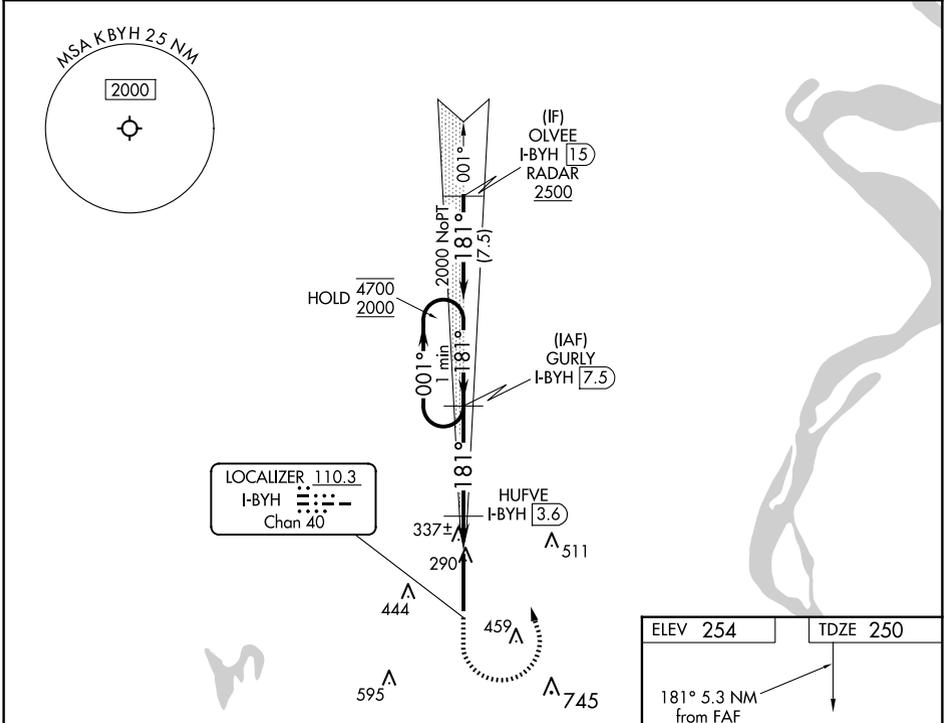

CATEGORY	A	B	C	D
S-ILS 18		450-3/4	200 (200-3/4)	
S-LOC 18		600-1	350 (400-1)	
C CIRCLING	700-1 446 (500-1)	720-1 466 (500-1)	800-1 1/2 546 (600-1 1/2)	820-2 566 (600-2)

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026