

APP CRS	Rwy Ldg	7000
211°	TDZE	43
	Apt Elev	46



RNAV (RNP) Z RWY 21

CHARLESTON AFB/INTL (CHS)

▽ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required.

MISSED APPROACH: Climb to 3000 on track 211° to FEPID and hold.

D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

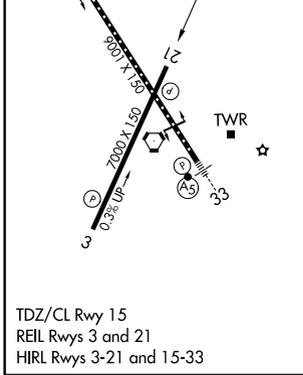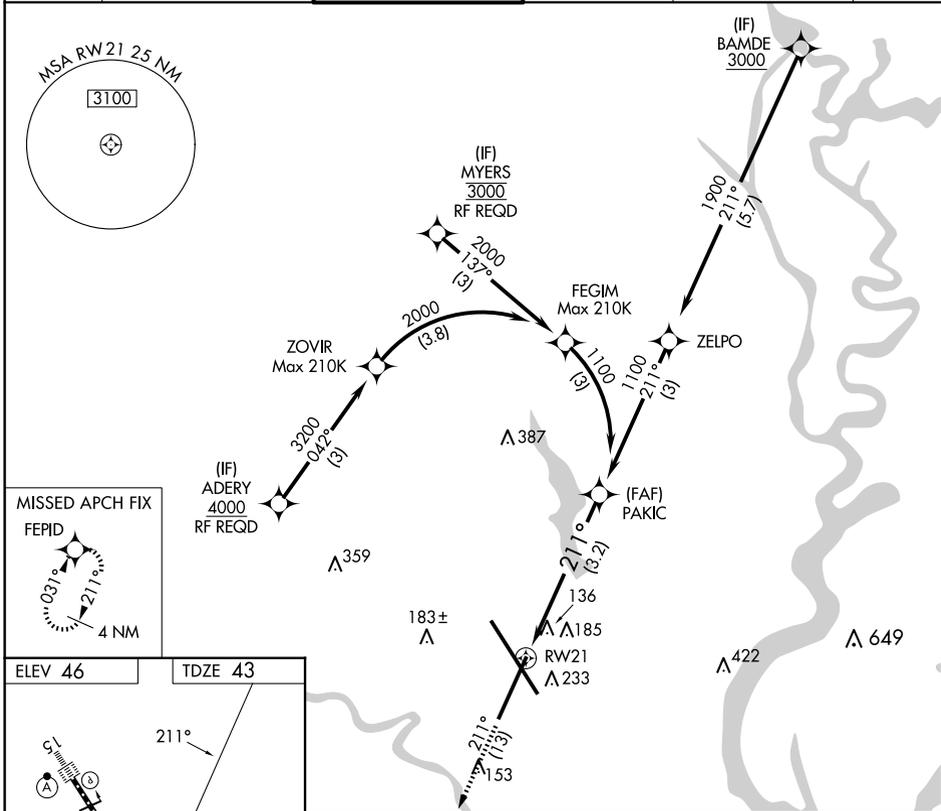

3000	↑	tr 211°	FEPID	See planview for multiple IF locations.
GP 3.00° TCH 50				
CATEGORY	A	B	C	D
RNP 0.21 DA		427-1½	384 (400-1½)	
RNP 0.30 DA		455-1¾	412 (500-1¾)	

AUTHORIZATION REQUIRED

SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026