

# RNAV (RNP) Z RWY 31L

DALLAS LOVE FLD (DAL)


APP CRS <b>313°</b>	Rwy Ldg <b>8000</b>
	TDZE <b>476</b>
	Apt Elev <b>487</b>

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase RNP 0.30 visibility all Cats to 2½ miles.

MALSR 

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.


D-ATIS <b>120.15</b>	LONE STAR APP CON <b>124.3 282.275 (N)</b> <b>125.2 343.65 (S)</b>	LOVE TOWER <b>123.7 239.3</b>	GND CON <b>121.75 348.6</b>
-------------------------	--	----------------------------------	--------------------------------

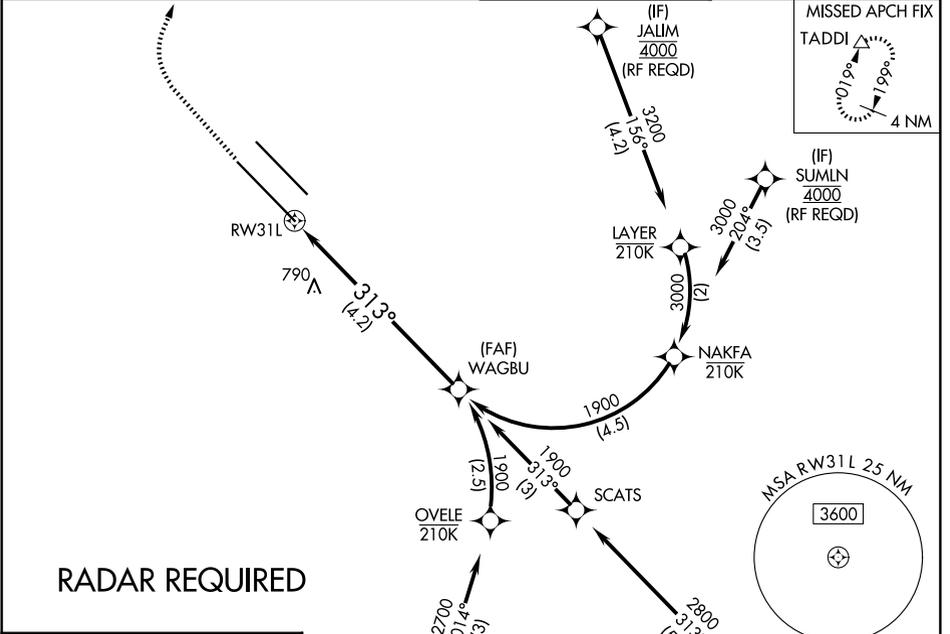

SC-2, 19 MAR 2026 to 16 APR 2026

SC-2, 19 MAR 2026 to 16 APR 2026


ELEV 487	<b>D</b>	TDZE 476
----------	----------	----------

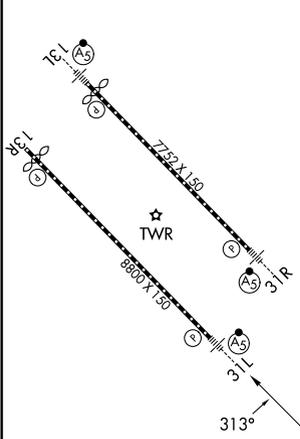

TDZL/RCLS Rwy 13L and 31L  
HIRL Rwy 13L-31R, and 13R-31L

1700 4000 TADDI See planview for multiple IF locations.



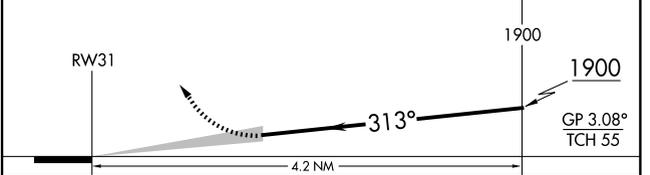

CATEGORY	A	B	C	D
RNP 0.30 DA		1117-1½	641 (700-1½)	

## AUTHORIZATION REQUIRED