

WAAS CH 42913 W06A	APP CRS 061°	Rwy Ldg 10900 TDZE 998 Apt Elev 1009
--	------------------------	---

RNAV (GPS) Z RWY 6L

JAMES M COX DAYTON INTL (DAY)

RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cats C/D to 1¼ SM.


ALSf-2



MISSED APPROACH: Climb to 3000 direct HEGUK and on track 331° to ICASI and on track 270° to DQN VOR/DME and hold.

ATIS 125.8	COLUMBUS APP CON 118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	---	------------------------------------	-------------------------

Procedure NA for arrival on DQN VOR/DME airway radials 208 CW 287.

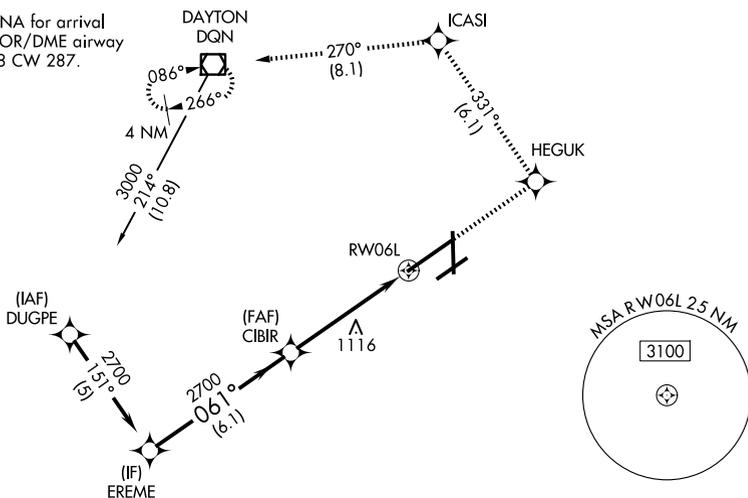


EC-2, 19 MAR 2026 to 16 APR 2026


EC-2, 19 MAR 2026 to 16 APR 2026

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).

ELEV 3000	HEGUK	ICASI	DQN
↑	tr 331°	tr 270°	☐

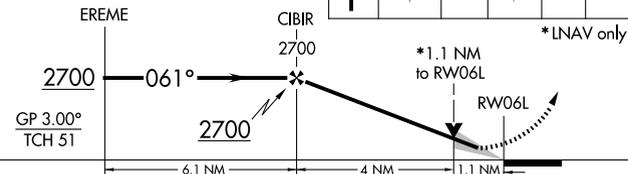

CATEGORY	A	B	C	D
LPV DA		1198/18	200 (200-½)	
LNAV/VNAV DA		1366/40	368 (400-¾)	
LNAV MDA	1420/24	422 (500-½)	1420/40 422 (500-¾)	1420/50 422 (500-1)
CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-1½)	1640-2 631 (700-2)

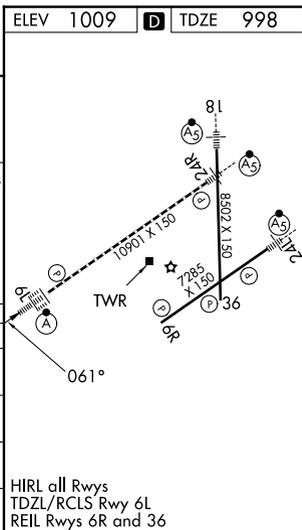

HIRL all Rwys
TDZL/RCLS Rwy 6L
REIL Rwys 6R and 36