

ATKNN FIVE DEPARTURE (RNAV)

SC-3, 19 MAR 2026 to 16 APR 2026

TOP ALTITUDE: ASSIGNED BY ATC




D-ATIS 120.0 254.3
 CLNC DEL 125.0 379.1
 GND CON 121.9 348.6
 EL PASO TOWER 118.3 239.275
 EL PASO DEP CON 119.15 263.0
 ALBUQUERQUE CENTER 128.2 285.5

TAKEOFF MINIMUMS

Rwy 8R: FLOGS and NOCHI Transitions standard with minimum climb of 500' per NM to 6000. GREBE and SLINK Transitions standard with minimum climb of 500' per NM to 13500.

Rwy 22: FLOGS and NOCHI Transitions standard with minimum climb of 515' per NM to 7200. GREBE and SLINK Transitions standard with minimum climb of 515' per NM to 13500.

Rwy 26L: FLOGS and NOCHI Transitions standard with minimum climb of 570' per NM to 6800. GREBE and SLINK Transitions standard with minimum climb of 570' per NM to 13500.

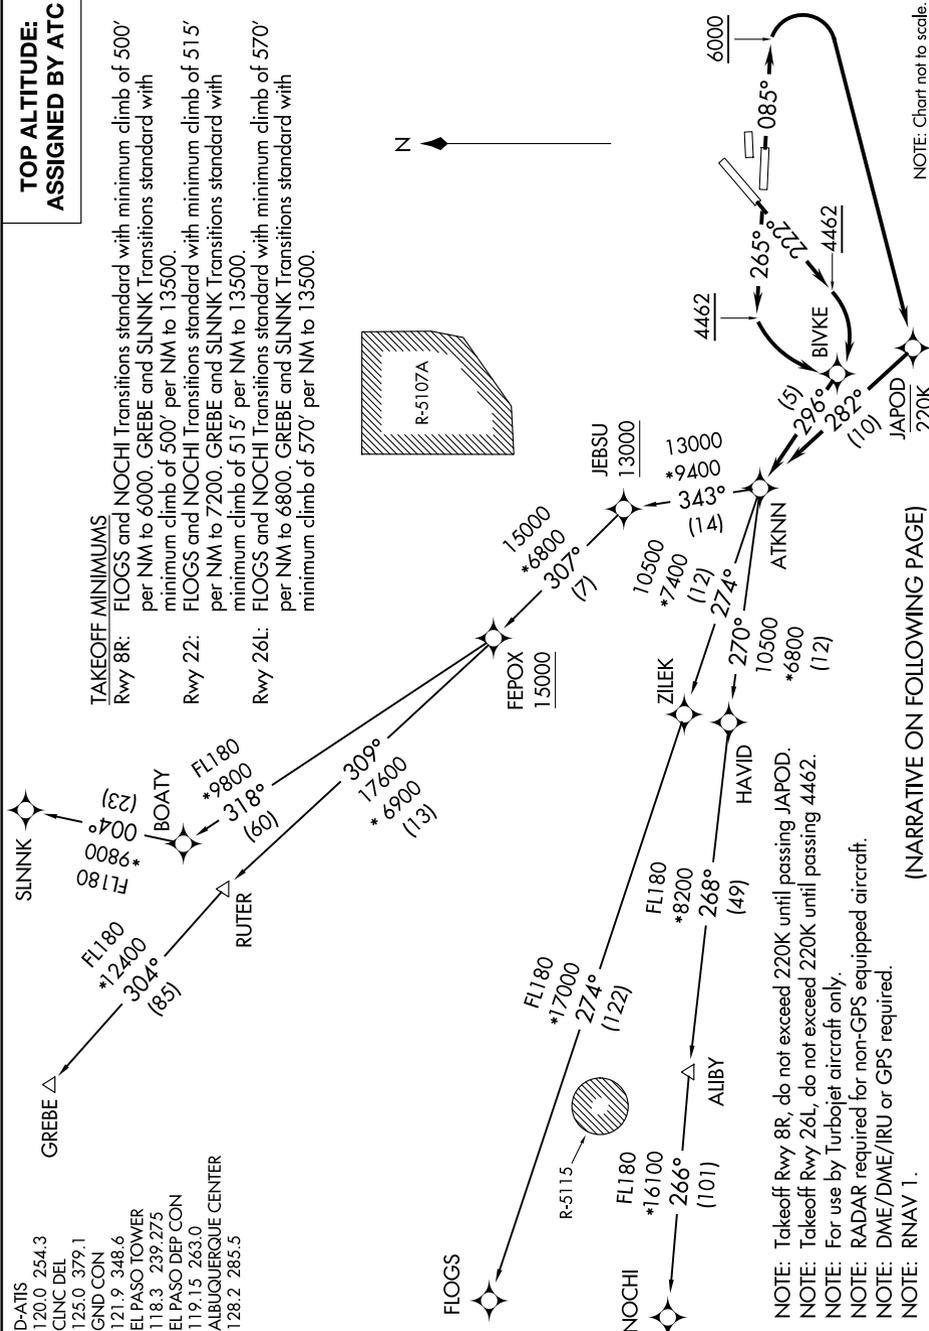

(NARRATIVE ON FOLLOWING PAGE)

- NOTE: Takeoff Rwy 8R, do not exceed 220K until passing JAPOD.
- NOTE: Takeoff Rwy 26L, do not exceed 220K until passing 4462.
- NOTE: For use by Turbojet aircraft only.
- NOTE: RADAR required for non-GPS equipped aircraft.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.

NOTE: Chart not to scale.

ATKNN FIVE DEPARTURE (RNAV)

(ATKNN5.ATKNN) 21JUL16

SC-3, 19 MAR 2026 to 16 APR 2026