




LOC I-AAM 108.9	APP CRS 176°	Rwy Ldg TDZE Apt Elev 9001 900 901
---------------------------	------------------------	--

ILS or LOC RWY 18

HECTOR INTL (FAR)

ADF or DME required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 2500 direct FAR VOR/DME and hold.
 For inop MALSR, increase S-ILS 18 Cat E visibility to RVR 4000, and S-LOC 18 Cat E visibility to RVR 5000. * Visibility Cat A/B/C/D RVR 1800 authorized with the use of FD or AP or HUD to DA.		

ATIS 124.5 379.2	FARGO APP CON 120.4 377.15	FARGO TOWER 133.8 290.4	GND CON 121.9 348.6
----------------------------	--------------------------------------	-----------------------------------	-------------------------------

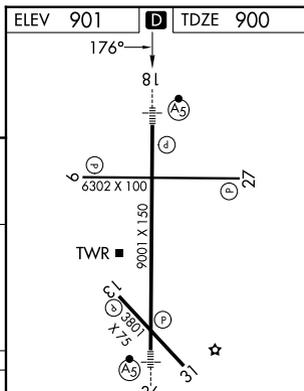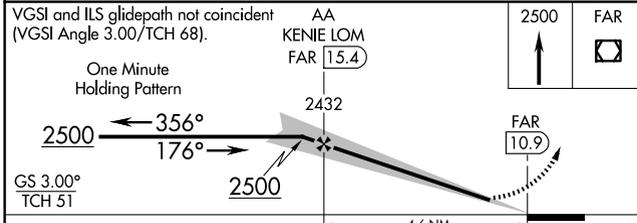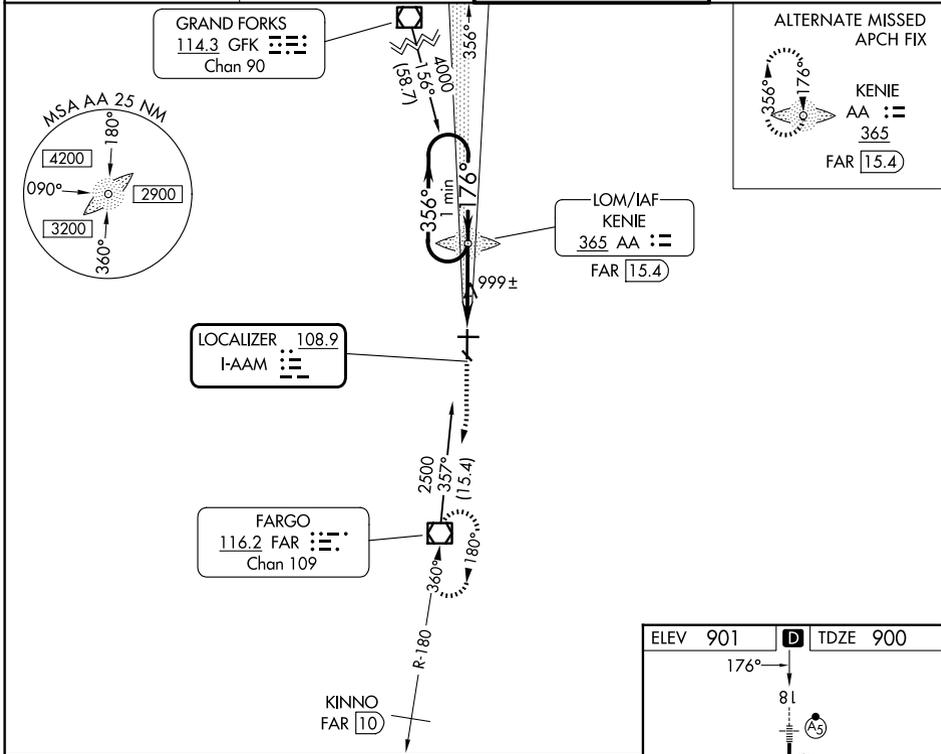

CATEGORY	A	B	C	D	E												
S-ILS 18*	1100/24 200 (200-1/2)																
S-LOC 18	1260/24	360 (400-1/2)	1260/40 360 (400-3/4)														
CIRCLING	1380-1	479 (500-1)	1520-1 3/4 619 (700-1 3/4)	1620-2 1/4 719 (800-2 1/4)	1620-2 1/2 719 (800-2 1/2)												
	HIRL Rwy 18-36 REIL Rws 9 and 27 MIRL Rws 9-27 and 13-31 FAF to MAP 4.6 NM																
	<table border="1"> <tr> <td>Knots</td> <td>60</td> <td>90</td> <td>120</td> <td>150</td> <td>180</td> </tr> <tr> <td>Min:Sec</td> <td>4:36</td> <td>3:04</td> <td>2:18</td> <td>1:50</td> <td>1:32</td> </tr> </table>					Knots	60	90	120	150	180	Min:Sec	4:36	3:04	2:18	1:50	1:32
Knots	60	90	120	150	180												
Min:Sec	4:36	3:04	2:18	1:50	1:32												

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026