

GLADZ FOUR DEPARTURE (RNAV)

SE-3, 19 MAR 2026 to 16 APR 2026


RNAV-1 DME/DME/IRU or GPS.
 RADAR required for NON-GPS equipped aircraft.
 RADAR required.

**TOP ALTITUDE:
ASSIGNED BY ATC**

MIAMI DEP CON
 126.85 290.325
 ATIS
 125.9
 CLNC DEL
 119.2
 GND CON
 120.025
 OPA LOCKA TOWER ★
 134.675 (CTAF)

NOTE: Jet aircraft only.
 NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
 NOTE: SHAGQ and BAGGS transitions ATC assigned except aircraft departing MIA.

TAKEOFF MINIMUMS
 Rwy 27L, 30: Standard
 Rwy 9L: Standard with minimum climb of 500'/NM to 1000.
 Rwy 9R: Standard with minimum climb of 500'/NM to 700.
 Rwy 12, 27R: Standard with minimum climb of 500'/NM to 600.

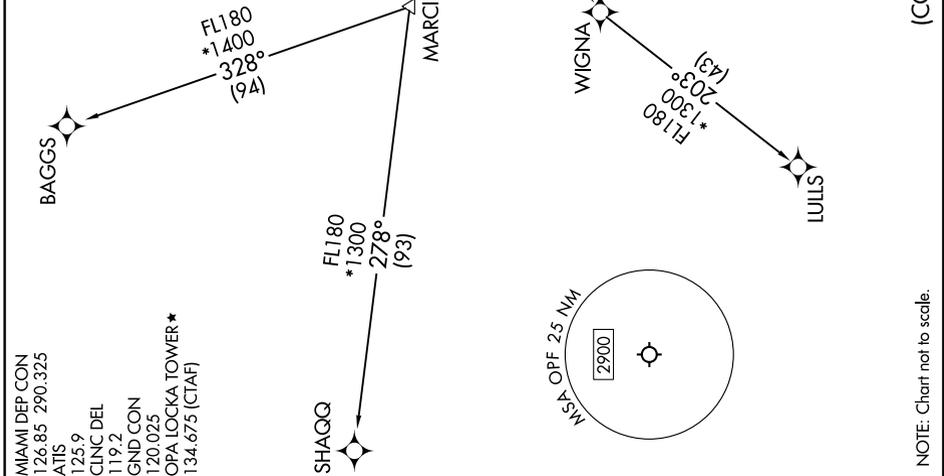

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 19 MAR 2026 to 16 APR 2026