

MAYNR THREE DEPARTURE (RNAV)

SE-3, 19 MAR 2026 to 16 APR 2026

**TOP ALTITUDE:
ASSIGNED BY ATC**





RNAV 1 - DME/DME/IRU or GPS.
 From SLIPT to MAXIM: RNAV 1 - GPS.
 From SLIPT to CANOA: RNAV 1 - GPS.
 RADAR required for non-GPS equipped aircraft.
 RADAR required.

MIAMI DEP CON
 126.85 290.325
 ATIS
 125.9
 CLNC DEL
 119.2
 GND CON
 120.025
 OPA LOCKA TOWER ★
 134.675 (CTAF)

TAKEOFF MINIMUMS

Rwy 9L: Standard with minimum climb of 500'/NM to 1000.
 Rwy 9R: Standard with minimum climb of 500'/NM to 700.
 Rwys 12, 27R: Standard with minimum climb of 500'/NM to 600.
 Rwys 27L, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.
 NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

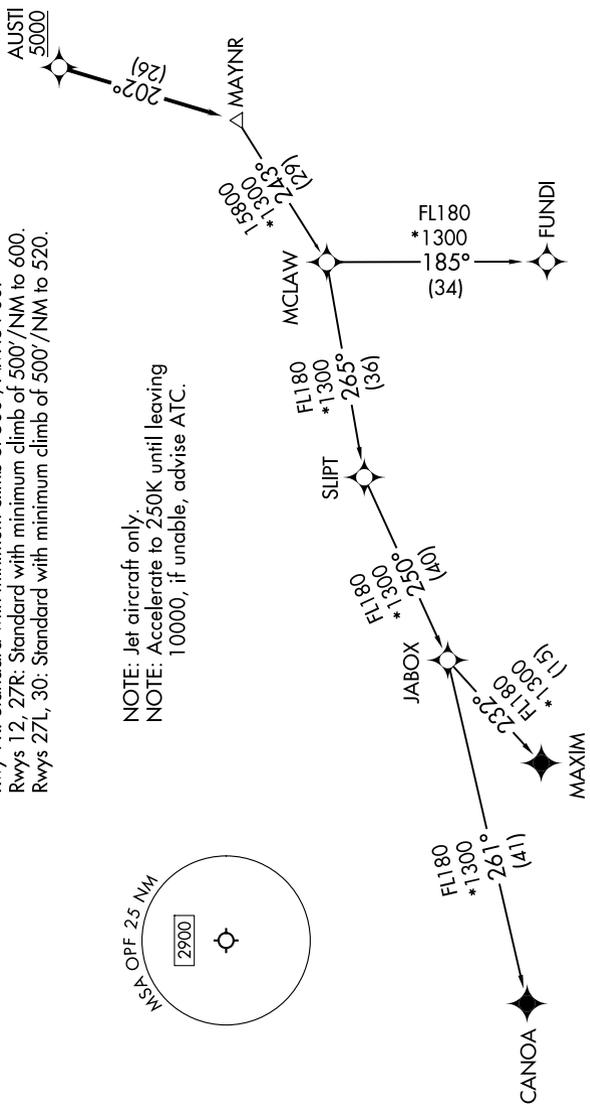

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-3, 19 MAR 2026 to 16 APR 2026