

MIAMI, FLORIDA

AL-257 (FAA)

25275

WAAS CH 81931 W09A	APP CRS 092°	Rwy Ldg 11397 TDZE 8 Apt Elev 9
--	------------------------	--



RNAV (GPS) RWY 9

MIAMI INTL (MIA)



RNP APCH - GPS.	MALSRL	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct VKZ VOR/DME and hold, continue climb-in-hold to 3000.
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 8°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cat E visibility to 1$\frac{1}{8}$ SM.</p> <p>*RVR 1800 authorized with use of FD or AP or HUD to DA.</p>		

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
-------------------------	--------------------------------------	-----------------------------------	---

CAUTION: Lights on highway 1/4 mile south of final approach course may be mistaken for runway.

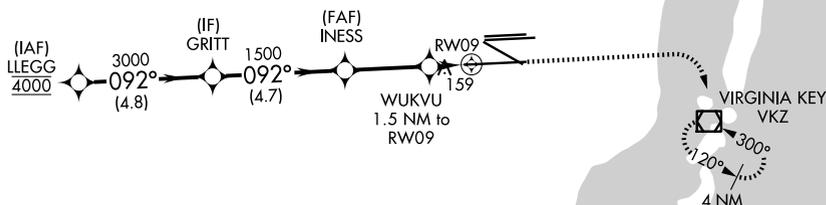

ELEV 9	D TDZE 8
--------	-----------------

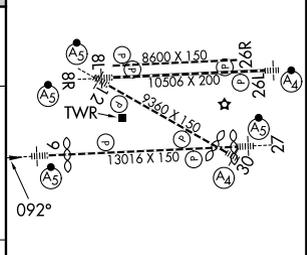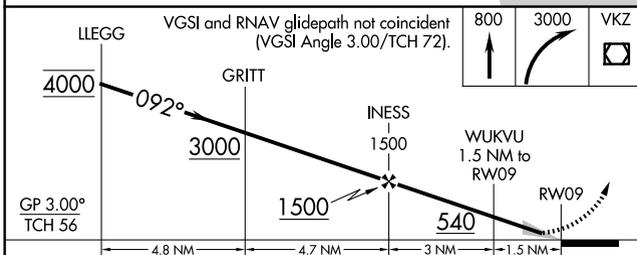

CATEGORY	A	B	C	D	E
LPV DA*	208/24		200 (200-1/2)		
LNAV/VNAV DA	426/40		418 (500-3/4)		
LNAV MDA	460/24	452 (500-1/2)	460/45	452 (500-7/8)	

TDZ/CL Rwy 8R
REIL Rwy 8L and 26R
HIRL all Rwy 9s

MIAMI, FLORIDA
Amdt 2 14JUL22

25°48'N-80°17'W

MIAMI INTL (MIA) RNAV (GPS) RWY 9

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026