

MIAMI, FLORIDA

AL-257 (FAA)

26022

APP CRS	Rwy Ldg	12755
272°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27

MIAMI INTL (MIA)



RNP AR APCH-GPS.

▼ Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.

MALSR 

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 348.6 127.5 (9/27/30)
-------------------------	--------------------------------------	-----------------------------------	--

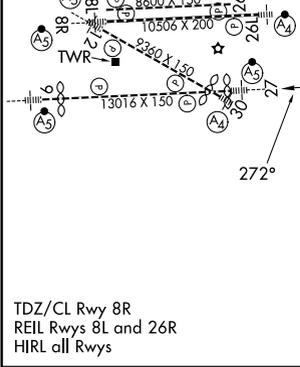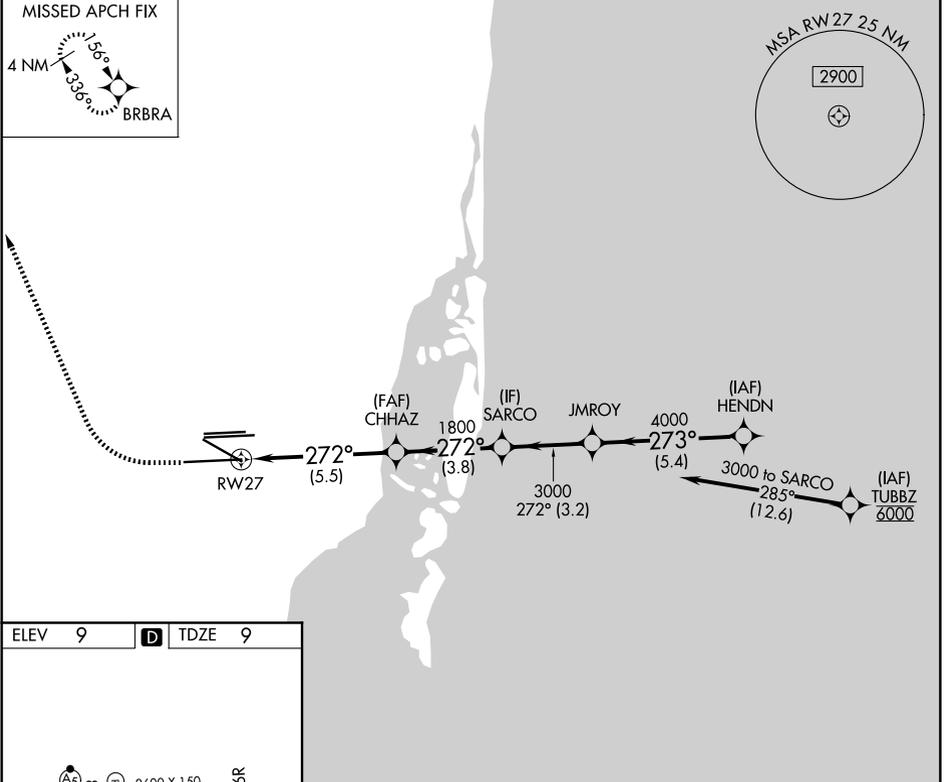

ELEV 9	D	TDZE 9
<p>800 4000 BRBRA VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).</p>		
<p>CHHAZ SARCO JMROY HENDN</p>		
<p>RWY 27 1800 3000 4000 5000</p>		
<p>5.5 NM 3.8 NM 3.2 NM 5.4 NM</p>		
CATEGORY	A	B C D
RNP 0.11 DA	327/24	318 (400-½)
RNP 0.30 DA	405/35	396 (400-¾)
AUTHORIZATION REQUIRED		

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)
RNAV (RNP) Z RWY 27

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026