


LOC/DME I-VKG <b>111.5</b> Chan <b>52</b>	APP CRS <b>146°</b>	Rwy Ldg <b>6148</b> TDZE <b>705</b> Apt Elev <b>705</b>
---	------------------------	---

# ILS or LOC RWY 14

ST PAUL DOWNTOWN HOLMAN FLD (STP)

DME required.		MALS R AS	MISSED APPROACH: Climb to 1700 then climbing left turn to 4000 on heading 355° and on FGT VORTAC R-011 to WHISK INT/FGT 32 DME/RADAR and hold.
Rwy 14 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 14. For inop ALS, increase S-LOC 14 Cat A/B visibility to RVR 5500 and Cat C/D visibility to 1 3/8 SM. -30°C			


ATIS <b>118.35</b>	MINNEAPOLIS APP CON <b>121.2 335.65</b>	ST. PAUL TOWER ★ <b>119.1</b> (CTAF) <b>257.8</b>	GND CON <b>121.675</b>	UNICOM <b>122.95</b>
-----------------------	--	--	---------------------------	-------------------------

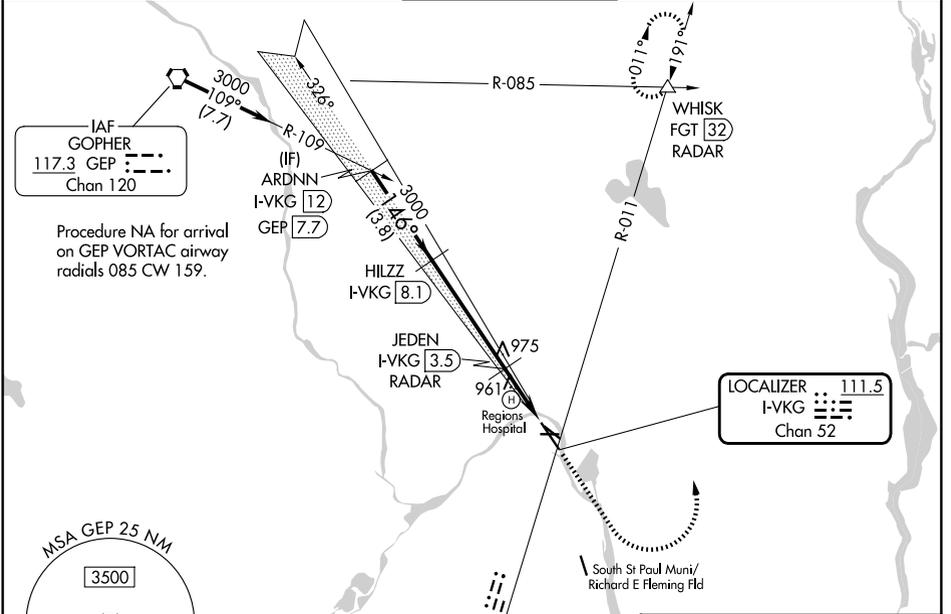

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026

ELEV 705	TDZE 705
----------	----------

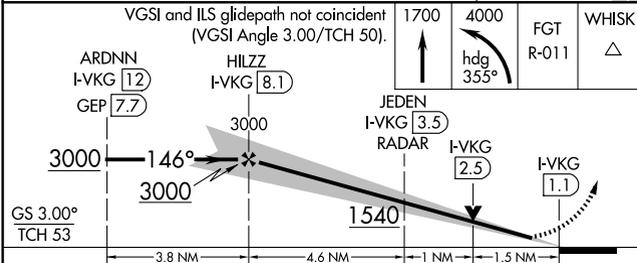

CATEGORY	A	B	C	D
S-ILS 14	955/40 250 (300-3/4)			
S-LOC 14	1220/40	515 (600-3/4)	1220/55	515 (600-1)
CIRCLING	1580-1 1/4	875 (900-1 1/4)	1580-2 1/2	1600-3
			875 (900-2 1/2)	895 (900-3)

