

# RNAV (RNP) Y RWY 29

NEWARK LIBERTY INTL (EWR)


APP CRS	Rwy Ldg	<b>6501</b>
<b>288°</b>	TDZE	<b>10</b>
	Apt Elev	<b>18</b>

RNP AR APCH. RF required.



▼ For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Caution, departing TEB Rwy 24 traffic climbing to 1500' MSL. Straight-In Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold. \*Missed approach requires minimum climb of 417 feet per NM to 800.

D-ATIS <b>115.7 134.825</b>	NEWARK APP CON <b>128.55 379.9</b>	NEWARK TOWER <b>118.3 257.6</b>	GND CON <b>121.8</b>
--------------------------------	---------------------------------------	------------------------------------	-------------------------

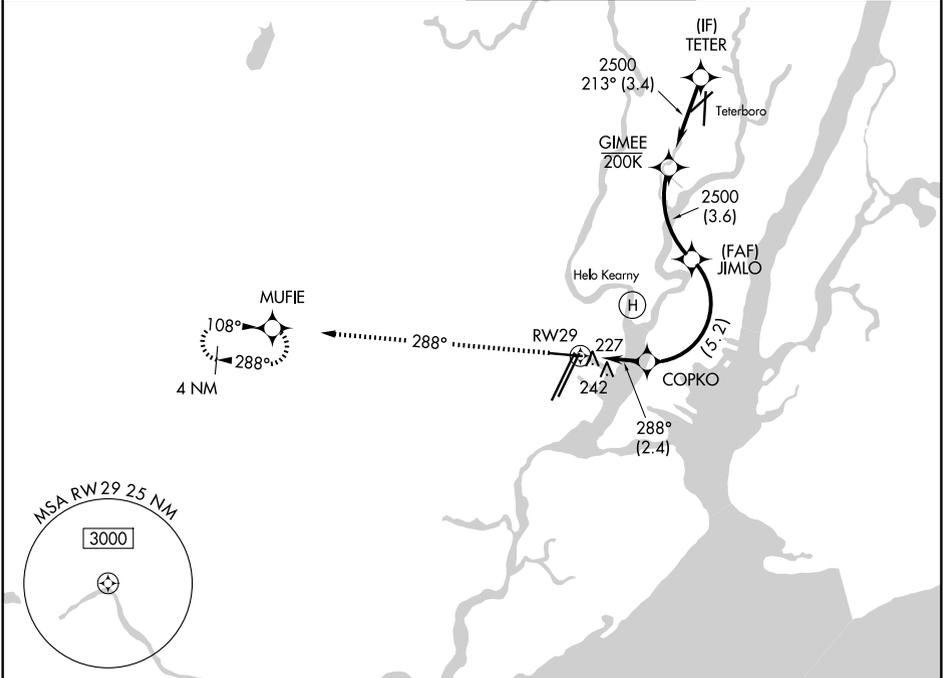

ELEV 18	<b>D</b>	TDZE 10
---------	----------	---------

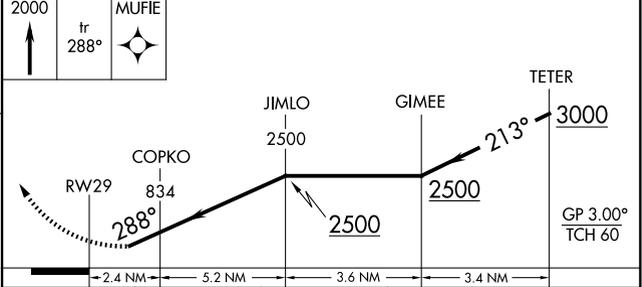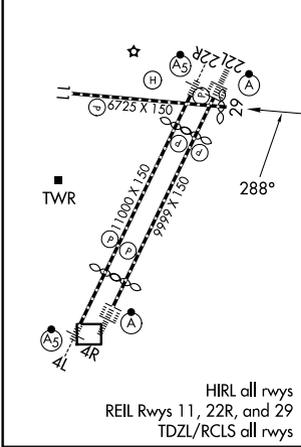

CATEGORY	A	B	C	D
RNP 0.16 DA		461-1 <sup>3</sup> / <sub>8</sub>	451 (500-1 <sup>3</sup> / <sub>8</sub> )	
RNP 0.30 DA*		583-1 <sup>3</sup> / <sub>8</sub>	573 (600-1 <sup>3</sup> / <sub>8</sub> )	
RNP 0.30 DA		625-1 <sup>3</sup> / <sub>4</sub>	615 (700-1 <sup>3</sup> / <sub>4</sub> )	

**AUTHORIZATION REQUIRED**

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026