

# RNAV (RNP) Z RWY 4R

NEWARK LIBERTY INTL (EWR)

APP CRS	Rwy Ldg	<b>8809</b>
<b>039°</b>	TDZE	<b>11</b>
	Apt Elev	<b>17</b>

RNP AR APCH.  
RADAR required.


ALSIF-2



For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1 1/2 SM.

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 560 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then dimbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.  
\* Missed approach requires minimum climb of 351 feet per NM to 660.



D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON
<b>115.7 134.825</b>	<b>128.55 379.9</b>	<b>118.3 257.6</b>	<b>121.8</b>

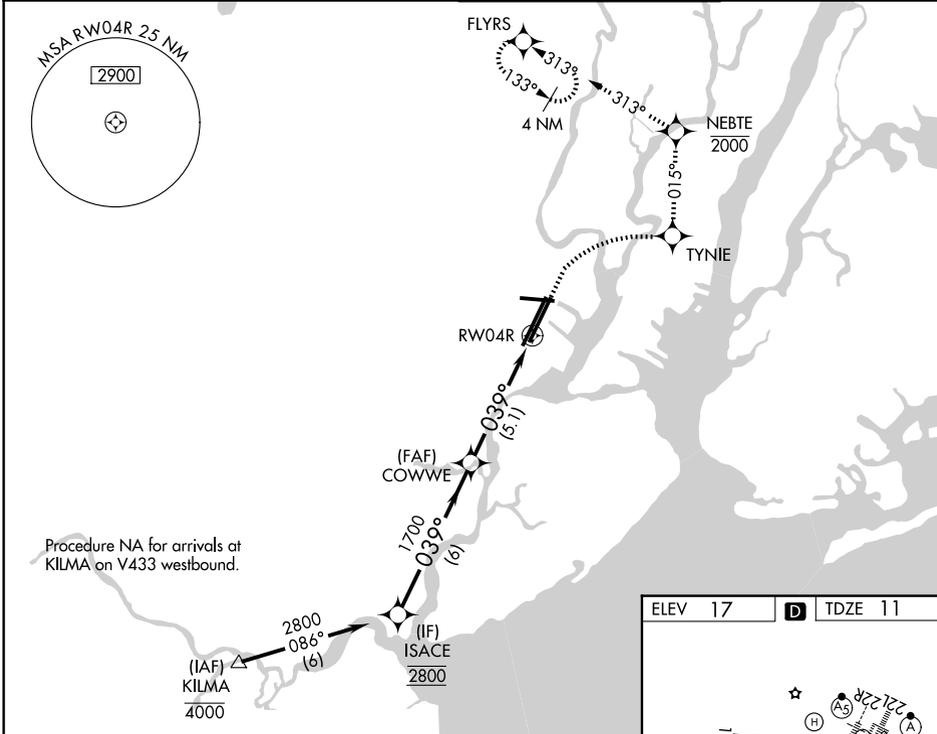

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026

ELEV 17	<b>D</b>	TDZE 11
---------	----------	---------

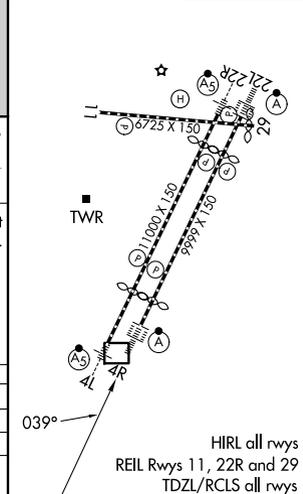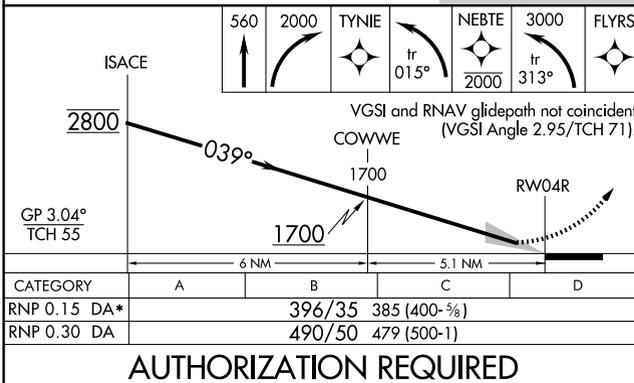

## AUTHORIZATION REQUIRED

# RNAV (RNP) Z RWY 4R