



LOC/DME I-EXR <b>110.9</b> Chan <b>46</b>	APP CRS <b>176°</b>	Rwy Ldg TDZE <b>1287</b> Apt Elev <b>1296</b>
---	------------------------	---

# ILS or LOC RWY 17L


OKC WILL ROGERS INTL (OKC)

DME required. RADAR required for procedure entry. Simultaneous approach authorized. Inop table does not apply to S-ILS 17L. For inop ALS, increase S-LOC 17L visibilities Cats A and B to RVR 5500, and Cat E to 1 $\frac{3}{8}$ SM. RURIQ Fix Minimums: For inop ALS, increase S-LOC 17L visibilities Cats A and B to RVR 5500, and Cats C, D, and E to RVR 6000. Autopilot coupled approach NA below 1840.		MALSR 	MISSED APPROACH: Climb to 5000 on heading 180° and on IRW VORTAC R-168 to JAVXE/IRW 11.6 DME and hold, continue climb-in-hold to 5000.
--	--	-----------	--

D-ATIS <b>125.85</b>	OKE CITY APP CON <b>124,6 266,8</b>	ROGERS TOWER <b>119,35 269,45</b>	GND CON <b>121.9 348.6</b>
-------------------------	--	--------------------------------------	-------------------------------

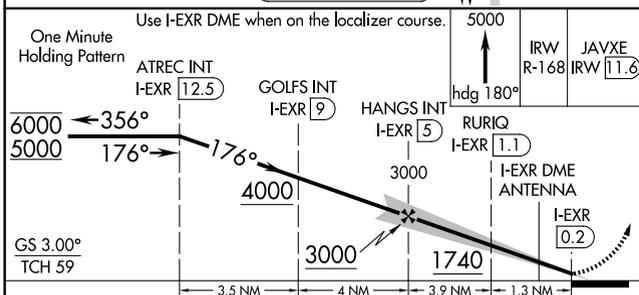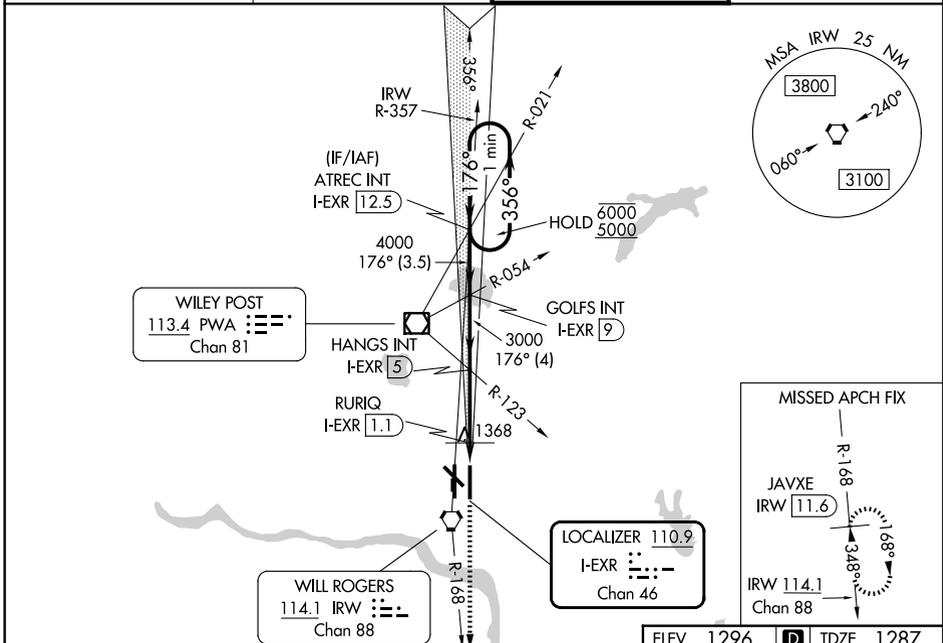

ELEV 1296	<b>D</b>	TDZE 1287
-----------	----------	-----------

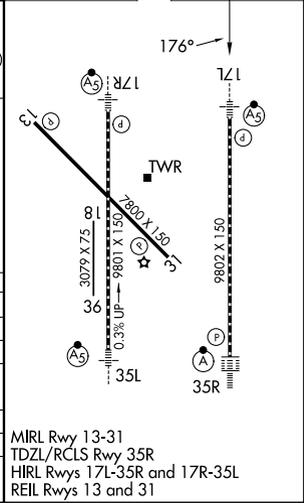

CATEGORY	A	B	C	D	E
S-ILS 17L	1487/40 200 (200- $\frac{3}{4}$ )				
S-LOC 17L	1740/40	453 (500- $\frac{3}{4}$ )	1740/45	453 (500- $\frac{7}{8}$ )	
CIRCLING	1740-1 444 (500-1)	1760-1 464 (500-1)	1960-1 $\frac{3}{4}$ 664 (700-1 $\frac{3}{4}$ )	2000-2 $\frac{1}{4}$ 704 (800-2 $\frac{1}{4}$ )	2240-3 944 (1000-3)
RURIQ FIX MINIMUMS					
S-LOC 17L	1680/40 393 (400- $\frac{3}{4}$ )				
CIRCLING	1740-1 444 (500-1)	1760-1 464 (500-1)	1960-1 $\frac{3}{4}$ 664 (700-1 $\frac{3}{4}$ )	2000-2 $\frac{1}{4}$ 704 (800-2 $\frac{1}{4}$ )	2240-3 944 (1000-3)

MIRL Rwy 13-31  
 TDZL/RCLS Rwy 35R  
 HIRL Rwys 17L-35R and 17R-35L  
 REIL Rwys 13 and 31

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026