

PANAMA CITY, FLORIDA

# RNAV (GPS) RWY 32L

WAAS CH <b>71279</b> W <b>32B</b>	APCH CRS <b>319°</b>	Rwy ldg TDZE Arprt Elev	<b>9134</b> <b>17</b> <b>17</b>
---	-------------------------	-------------------------------	---------------------------------------

(USAF)


TYNDALL AFB (KPAM)

RNP APCH-GPS MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct SUSIE and hold.



ATIS★ <b>254.4</b>	APP CON/DEP CON★ <b>119.775 317.45</b> BLW 5000' <b>124.15 338.35</b> ABV 5000'	TOWER★ <b>133.95 263.15</b>	GND CON <b>121.9 259.3</b>	ASR/PAR
-----------------------	---	--------------------------------	-------------------------------	---------

Average Cold Temperature based on standard -30.00°C ISA deviation.

For uncompensated Baro-VNAV systems, Procedure NA below 16°C (61°F) or above 54°C (130°F).

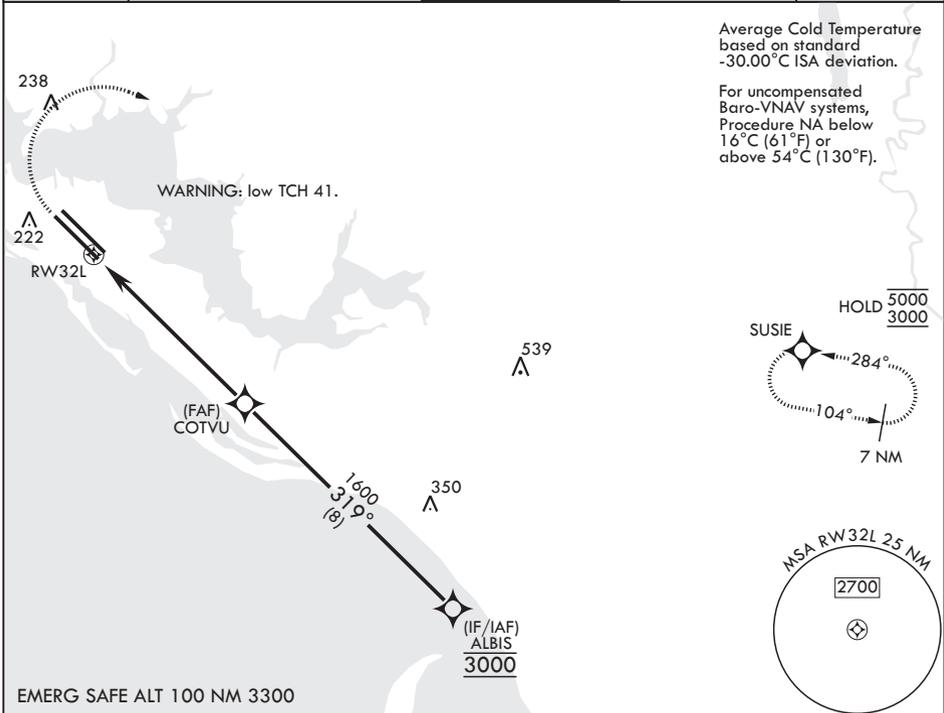

EMERG SAFE ALT 100 NM 3300

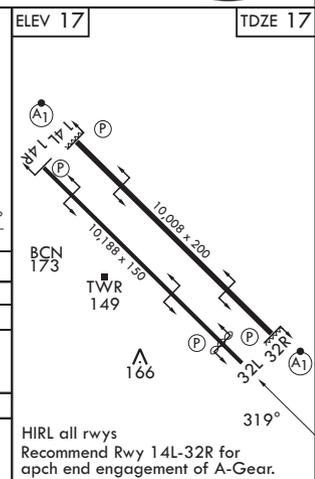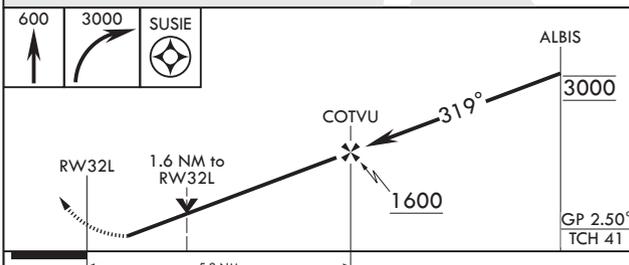

CATEGORY	A	B	C	D	E
LPV DA	217- <sup>3</sup> / <sub>4</sub>		200	(200- <sup>3</sup> / <sub>4</sub> )	
LNAV/VNAV DA	333- <sup>7</sup> / <sub>8</sub> 316 (400- <sup>7</sup> / <sub>8</sub> )	344-1 327 (400-1)	352-1 335 (400-1)	363-1	346 (400-1)
LNAV MDA	480-1	463 (500-1)	480-1 <sup>1</sup> / <sub>2</sub>	463	(500-1 <sup>1</sup> / <sub>2</sub> )
CIRCLING	540-1	523 (600-1)	540-1 <sup>1</sup> / <sub>2</sub> 523 (600-1 <sup>1</sup> / <sub>2</sub> )	580-2	563 (600-2)

PANAMA CITY, FLORIDA

30°04'N - 85°35'W

TYNDALL AFB (KPAM)

Amdt 4 19FEB26

# RNAV (GPS) RWY 32L

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026