


WAAS CH <b>65626</b> <b>W29A</b>	APP CRS <b>290°</b>	Rwy Ldg <b>7200</b> TDZE <b>56</b> Apt Elev <b>76</b>
--	------------------------	---

# RNAV (GPS) RWY 29


PORTLAND INTL JETPORT (P<sup>WM</sup>)

RNP APCH.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cat C/D visibility to 1¾ mile. **RVR 1800 authorized with use of FD or AP or HUD to DA.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 3000 direct BUXTO and hold, continue climb-in-hold to 3000.</p>
-----------	--	--------------	--

ATIS <b>119.05</b>	PORTLAND APP CON * <b>119.75 269.35</b>	PORTLAND TOWER * <b>120.9</b> (CTAF) <b>257.8</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-----------------------	--	--	-------------------------	-------------------------

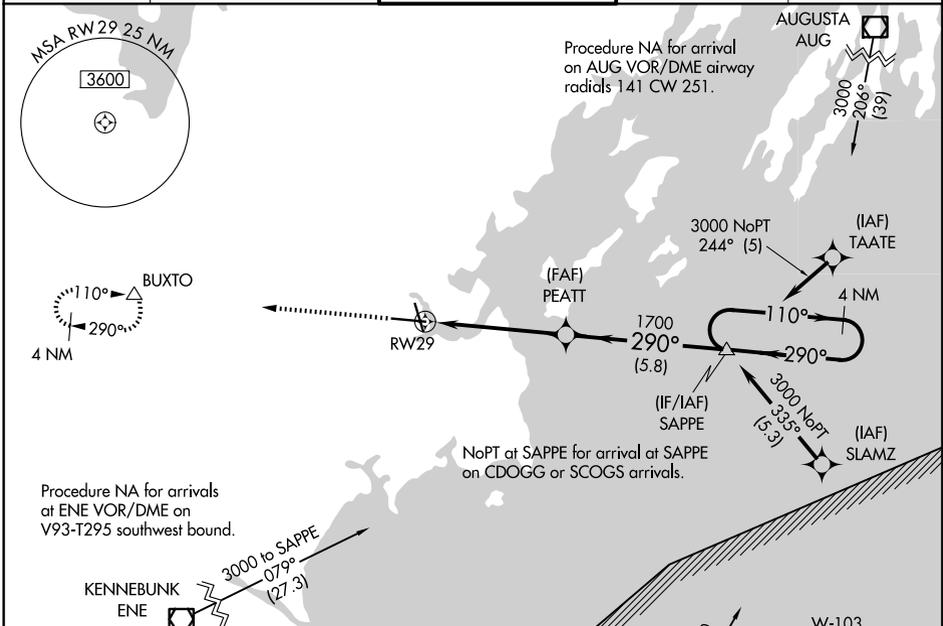

ELEV 76	<b>D</b>	TDZE 56
---------	----------	---------

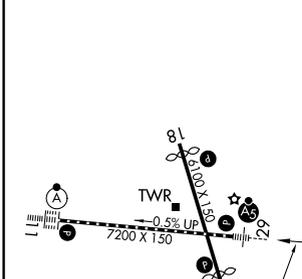

<p>3000 BUXTO</p> <p>* LNAV only</p> <p>* 1.5 NM to RW29</p> <p>1.5 NM   3.5 NM   5.8 NM</p>	<p>PEATT 1700</p> <p>SAPPE 3000</p> <p>1700</p> <p>110°</p> <p>290°</p> <p>4 NM Holding Pattern</p> <p>GP 3.00° TCH 50</p>																									
<p>TDZL/RCLS Rwy 11</p> <p>MIRL Rwy 18-36</p> <p>HIRL Rwy 11-29</p> <p>REIL Rws 18 and 36</p>	<table border="1"> <thead> <tr> <th>CATEGORY</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> </thead> <tbody> <tr> <td>LPV DA</td> <td colspan="4">** 256/24 200 (200-½)</td> </tr> <tr> <td>LNAV/VNAV DA</td> <td colspan="4">567-1¾ 511 (500-1¾)</td> </tr> <tr> <td>LNAV MDA</td> <td>580/24</td> <td>524 (600-½)</td> <td>580/55</td> <td>524 (600-1)</td> </tr> <tr> <td>CIRCLING</td> <td>620-1 544 (600-1)</td> <td>640-1 564 (600-1)</td> <td>740-1¾ 664 (700-1¾)</td> <td>860-2½ 784 (800-2½)</td> </tr> </tbody> </table>	CATEGORY	A	B	C	D	LPV DA	** 256/24 200 (200-½)				LNAV/VNAV DA	567-1¾ 511 (500-1¾)				LNAV MDA	580/24	524 (600-½)	580/55	524 (600-1)	CIRCLING	620-1 544 (600-1)	640-1 564 (600-1)	740-1¾ 664 (700-1¾)	860-2½ 784 (800-2½)
CATEGORY	A	B	C	D																						
LPV DA	** 256/24 200 (200-½)																									
LNAV/VNAV DA	567-1¾ 511 (500-1¾)																									
LNAV MDA	580/24	524 (600-½)	580/55	524 (600-1)																						
CIRCLING	620-1 544 (600-1)	640-1 564 (600-1)	740-1¾ 664 (700-1¾)	860-2½ 784 (800-2½)																						

NE-1, 19 MAR 2026 to 16 APR 2026

NE-1, 19 MAR 2026 to 16 APR 2026