

WAAS CH 82514 W23A	APP CRS 226°	Rwy Ldg TDZE Apt Elev	7031 3067 3082
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 23

ROBERTS FLD (RDM)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BDN altimeter setting. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. When local altimeter setting not received, use BDN altimeter setting and increase LPV DA to 3348 feet; increase LNAV/VNAV DA to 3586 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.


MALS R

MISSED APPROACH: Climb to 4600 then climbing right turn to 7000 direct CUPRI and hold.

ATIS 119.025	SEATTLE CENTER 126.15 269.475	REDMOND TOWER* 124.5 (CTAF) 0 256.8	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

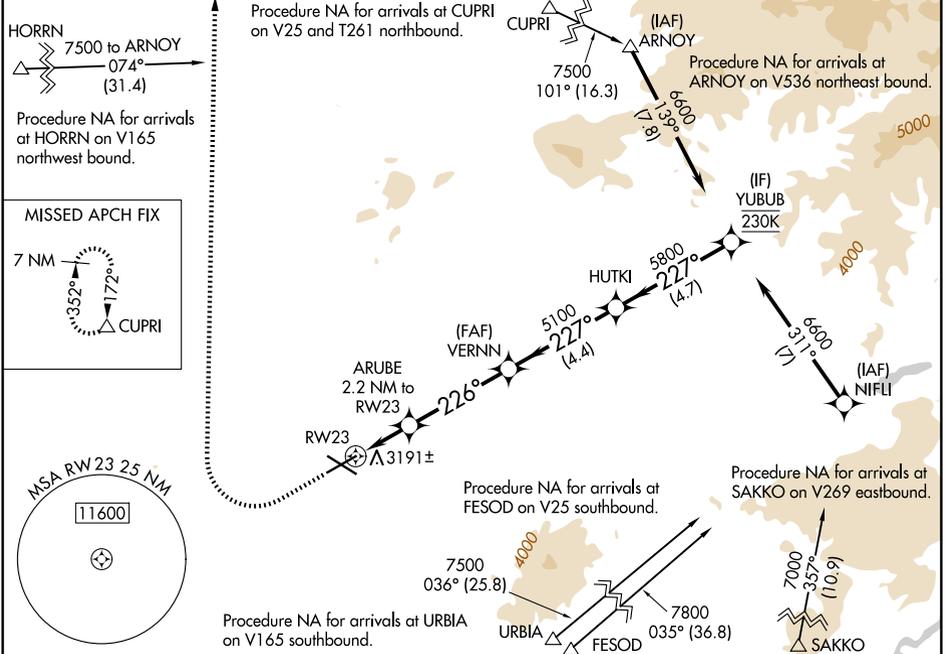

ELEV 3082	D	TDZE 3067	4600	7000	CUPRI	ARUBE	VERNN	HUTKI	YUBUB
-----------	---	-----------	------	------	-------	-------	-------	-------	-------

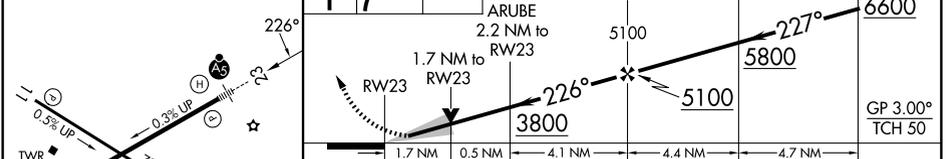

	A	B	C	D
CATEGORY				
LPV DA		3267-½	200 (200-½)	
LNAV/VNAV DA		3505-¾	438 (500-¾)	
LNAV MDA	3640-½	573 (600-½)	3640-1¼	573 (600-1¼)
CIRCLING	3640-1	558 (600-1)	3640-1½	3760-2¼
			558 (600-1½)	678 (700-2¼)

NW-1, 19 MAR 2026 to 16 APR 2026

NW-1, 19 MAR 2026 to 16 APR 2026