


LOC/DME I-ROW <b>109.9</b> Chan 36	APP CRS <b>215°</b>	Rwy Ldg <b>13000</b> TDZE <b>3633</b> Apt Elev <b>3671</b>
--	------------------------	--

# ILS Z or LOC Z RWY 21



ROSWELL AIR CENTER (ROW)

ADF or DME required.	MALSR	MISSED APPROACH: Climb to 5000 then climbing right turn to 6000 on CME VORTAC R-195 to CME VORTAC and hold, continue climb-in-hold to 6000.
<p><b>V</b> VDP NA when using Artesia altimeter setting. When local altimeter setting not received, use Artesia altimeter setting: increase DA to 3913 feet; increase all MDAs 80 feet and S-LOC 21 visibility Cat C/D 3/8 SM and Circling visibility Cat D 1/4 SM. For inop ALS when using Artesia altimeter setting, increase ILS all Cats visibility to 3/8 SM and LOC Cats C/D to 1/8 SM.</p> <p><b>ASR</b></p>		

ATIS <b>128.45 306.2</b>	ROSWELL APP CON* <b>119.6 239.0</b>	ROSWELL TOWER* <b>118.5 (CTAF) 0 233.7</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>132.875 282.25</b>	UNICOM <b>122.95</b>
-----------------------------	--	---	-------------------------------	-----------------------------------	-------------------------

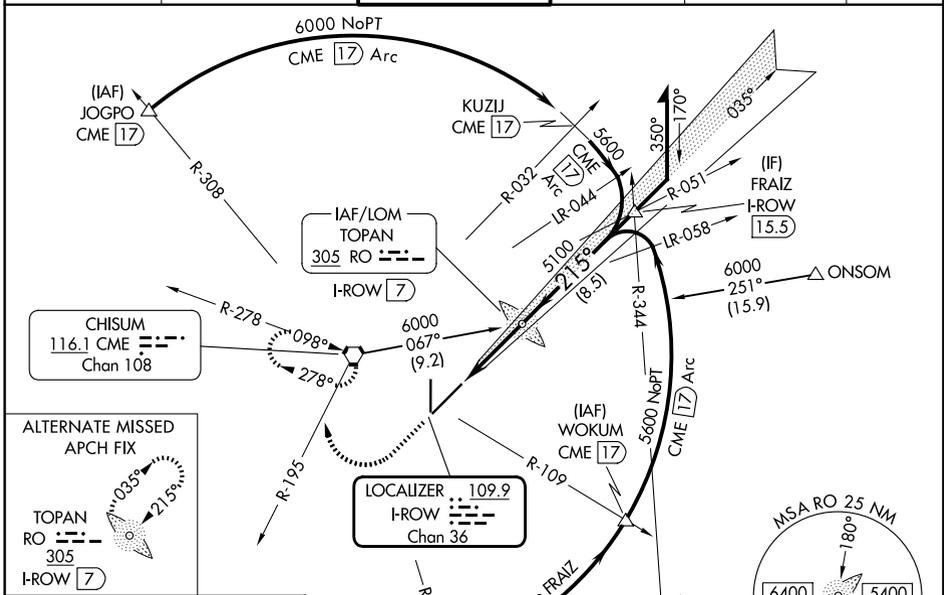

ELEV 3671	<b>D</b>	TDZE 3633
-----------	----------	-----------

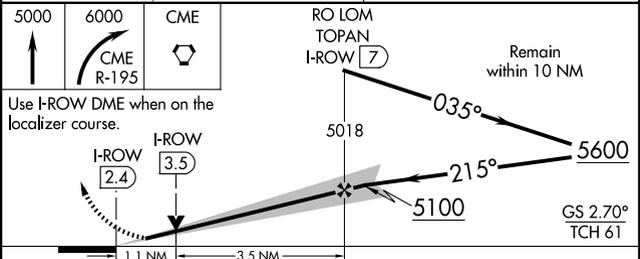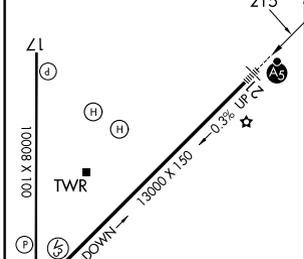

CATEGORY	A	B	C	D
S-ILS 21	3833-1/2 200 (200-1/2)			
S-LOC 21	4020-1/2	387 (400-1/2)	4020-5/8	387 (400-5/8)
CIRCLING	4140-1	469 (500-1)	4140-1 1/2	4300-2 629 (700-2)

SW-1, 19 MAR 2026 to 16 APR 2026

SW-1, 19 MAR 2026 to 16 APR 2026