

WAAS CH 50202 W03A	APP CRS 035°	Rwy Ldg 13000 TDZE 3667 Apt Elev 3671
---------------------------------	------------------------	------------------------------------------------------------------

RNAV (GPS) RWY 3


ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, Use Artesia altimeter setting; increase LPV DA to 3997 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅔ SM, Cat D ⅝ SM and Circling visibility Cat D ½ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON * 119.6 239.0	ROSWELL TOWER * 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	-----------------------------------------	------------------------------------------------	-------------------------------	-----------------------------------	-------------------------

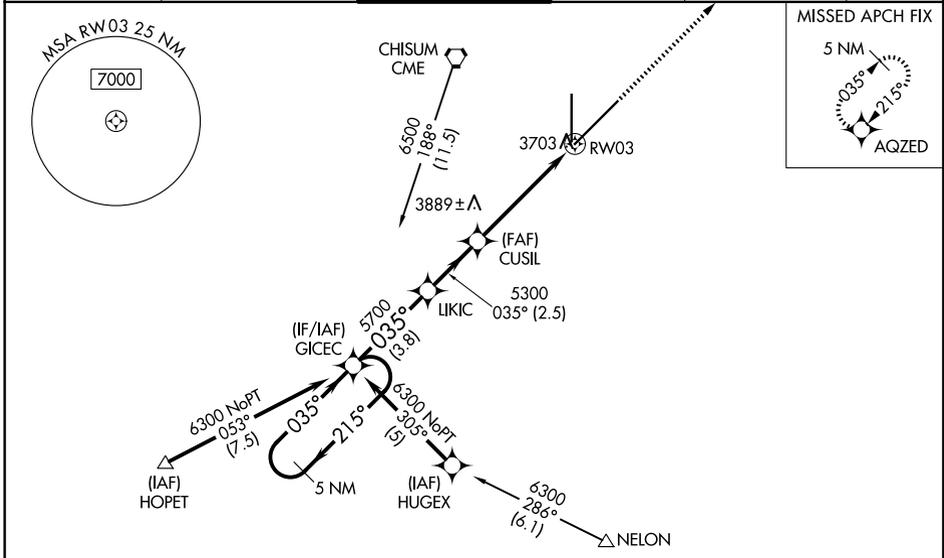

SW-1, 19 MAR 2026 to 16 APR 2026

SW-1, 19 MAR 2026 to 16 APR 2026

ELEV 3671		D TDZE 3667	
5 NM Holding Pattern		6000 AQZED	
GP 3.00° TCH 50		1.3 NM to RW03	
3.8 NM		2.5 NM	
3.6 NM		1.3 NM	
CATEGORY	A	B	C
LPV DA	3917-¾		250 (300-¾)
LNAV/VNAV DA	3987-1		320 (400-1)
LNAV MDA	4140-1	473 (500-1)	4140-1½ 473 (500-1½)
CIRCLING	4140-1	469 (500-1)	4140-1½ 469 (500-1½)
MIRL Rwy 3-21		MIRL Rwy 17-35	