

APP CRS	Rwy Ldg	<b>9000</b>
<b>123°</b>	TDZE	<b>617</b>
	Apt Elev	<b>617</b>

# RNAV (RNP) Z RWY 11

ST LOUIS LAMBERT INTL (STL)


RNP AR APCH - GPS, min RNP 0.30. Authorization required from HRBEE or RRIPP: RF.  
 RADAR required for procedure entry.

ALS-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct IMPER and hold.

Simultaneous approach authorized with Rwsy 12L/R, except for arrivals at RRIPP and HRBEE. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.


D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
<b>125,025</b> <b>379,925</b>	<b>132.125 360.6</b>	<b>132.475 239.275</b>	<b>121.9 348.6</b> (Inbound) <b>121.65 377.175</b> (Outbound) <b>118.925 227.125</b> (Rwy 11/29)	<b>119.5 363.1</b>	

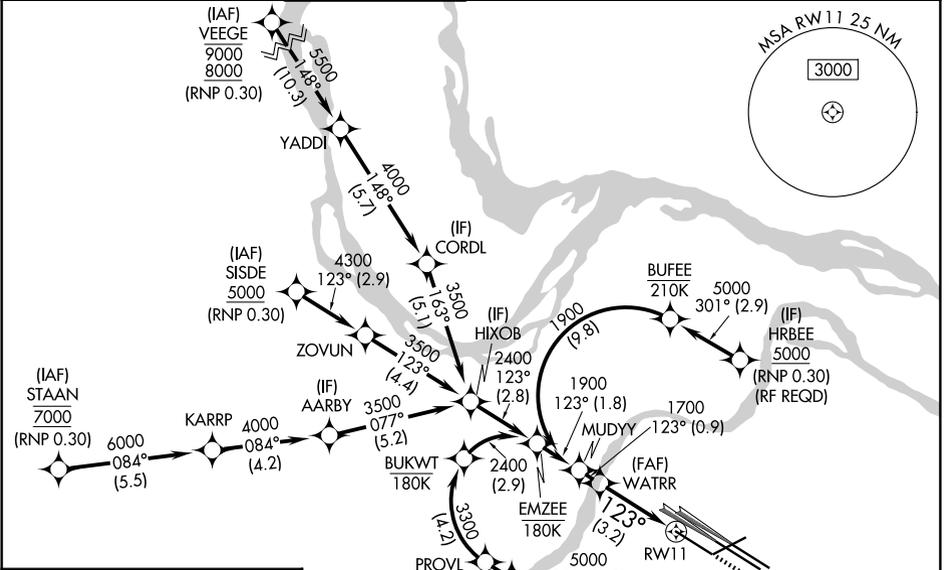

NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026


ELEV 617	<b>D</b>	TDZE 617
Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150		



MISSED APCH FIX

IMPER

4 NM

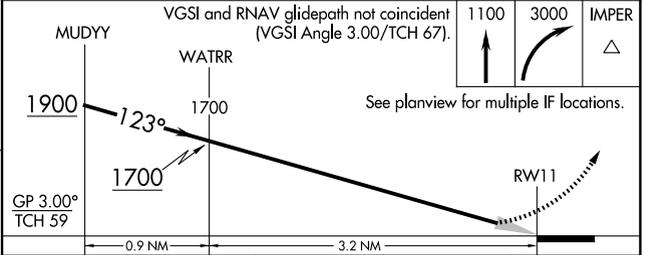

CATEGORY	A	B	C	D
RNP 0.30 DA	925/24 308 (400-1/2)			

HIRL all Rwsy  
 TDZ/CL Rwsy 11, 12L, 12R, 29, and 30R

## AUTHORIZATION REQUIRED