
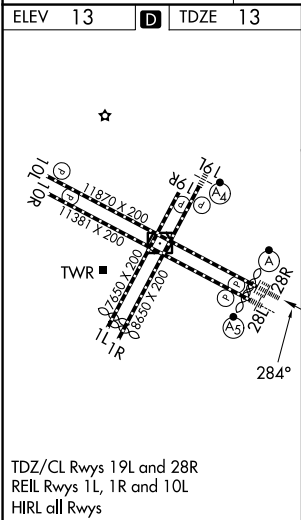


APP CRS	Rwy Ldg	11236
284°	TDZE	13
	Apt Elev	13

RNAV (RNP) Y RWY 28R
SAN FRANCISCO INTL (SFO)

RNP AR APCH, RF required.	ALSF-2	MISSED APPROACH: Climb to 3000 on track 284° to VIKYU and hold. * Missed approach requires minimum climb of 250 feet per NM to 1600. # Missed approach requires minimum climb of 350 feet per NM to 2100.
▼ For uncompensated Baro-VNAV systems, procedure NA below 3°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.		

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC
---------------------------------	-------------------------------	------------------------------------	------------------	-------------------	-------

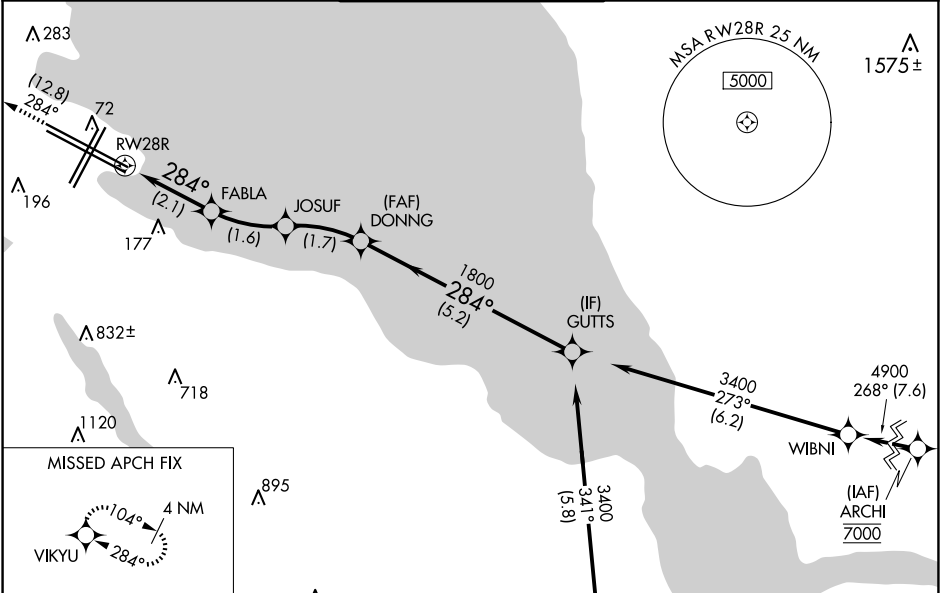

ELEV 13	TDZE 13
TDZ/CL Rwy 19L and 28R REIL Rwy 1L, 1R and 10L HIRL all Rwy	
3000 VIKYU VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68)	
GUTTS	
GP 3.00° TCH 55	
RW28R 284°	
FABLA 743	
JOSUF 1264	
DONNG 1800	
2.1 NM 1.6 NM 1.7 NM 5.2 NM	
CATEGORY	A B C D
RNP 0.11 DA*	263/24 250 (300-½)
RNP 0.30 DA#	326/24 313 (400-½)
AUTHORIZATION REQUIRED	